



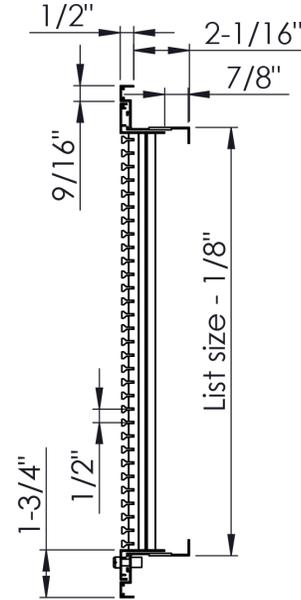

- Complements the appearance of our Bar Linear grilles.
- Fully-extruded, architectural aluminum construction.
- Fixed blades parallel to the length.
- Designed to fit a standard 1" filter depth.
- Available with durable powder coat finish.

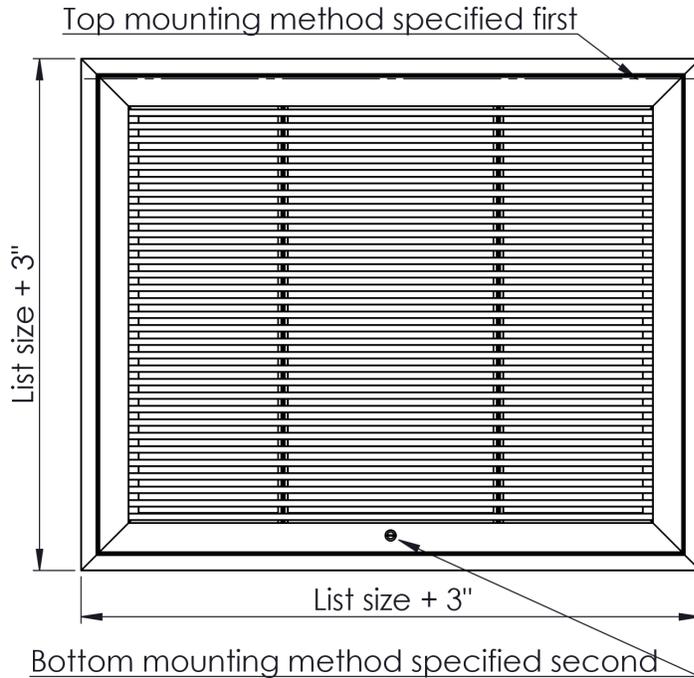

1" filter by others must be undersized by list-9/32".

1. Specify Quantity

2. Specify the Length x Height Dimensions

Available on 2" increments as standard. Custom sizes down to 1/16" increments.

_____ x _____ inches mm

3. Select a Blade Option

- | | |
|--|---|
| <input type="checkbox"/> <u>00</u> - 0° Deflection | <input type="checkbox"/> <u>30</u> - 30° Deflection |
| <input type="checkbox"/> <u>01</u> - 0° Pencil Proof | <input type="checkbox"/> <u>82</u> - 0° Air Flow |
| <input type="checkbox"/> <u>15</u> - 15° Deflection | <input type="checkbox"/> <u>84</u> - 0° Heel Proof |

4. Select a Top Mounting Option

Optional to specify. B - Wire Hinge is standard.

5. Select a Bottom Mounting Option

Optional to specify. C - Nylon Thumb Screw is standard.

- | | |
|---|---|
| <input type="checkbox"/> <u>B</u> - Wire Hinge | <input type="checkbox"/> <u>C</u> - Nylon Thumb Screw |
| <input type="checkbox"/> <u>C</u> - Nylon Thumb Screw | <input type="checkbox"/> <u>D</u> - Nylon Screen Tabs |
| <input type="checkbox"/> <u>D</u> - Nylon Screen Tabs | <input type="checkbox"/> <u>E</u> - Security Screw |
| <input type="checkbox"/> <u>E</u> - Security Screw | |

6. Select a Finish

- W - White
- S - Silver
- M - Mill

7. Select a Lead Time

- 3 Day Ship
- Next Friday
- Standard Delivery



Project / Location:
 Architect:
 Engineer:
 Contractor:




Scan for more product information.

BLADE OPTIONS


-00

0° 13/64" blades on 1/2" centers

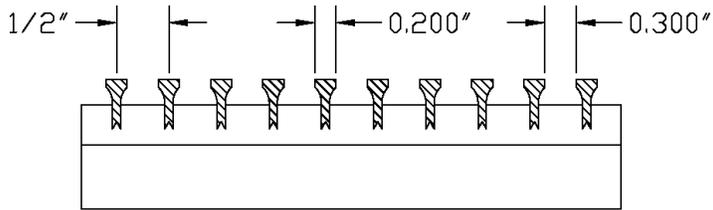


-01

0° 1/4" blades on 1/2" centers

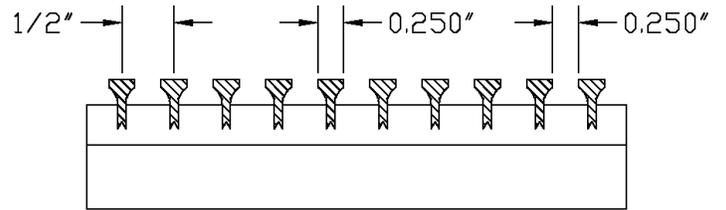


-15

15° 13/64" blades on 1/2" centers

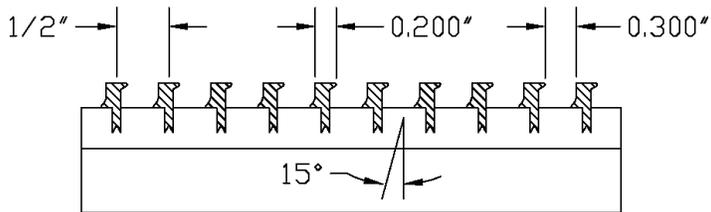


-30

30° 13/64" blades on 1/2" centers

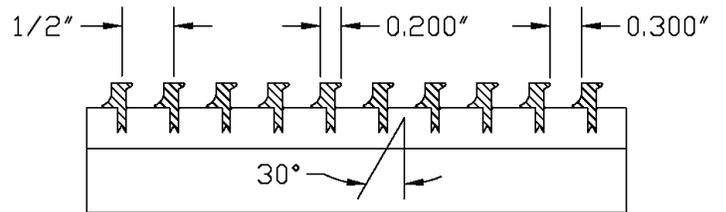


-82

0° 1/8" blades on 1/2" centers

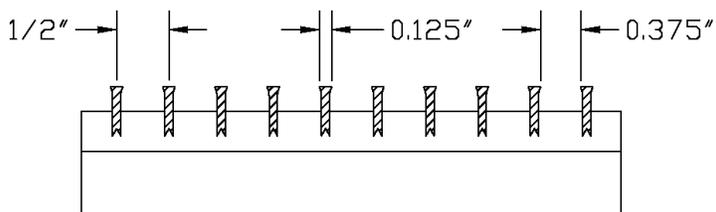

-84

0° 1/8" blades on 1/4" centers

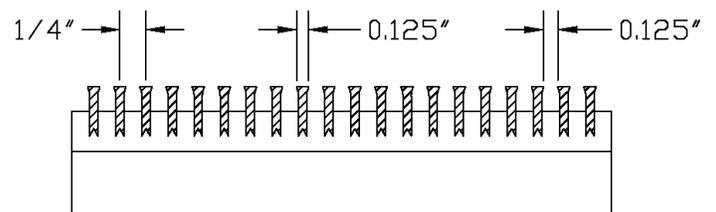



Scan for more
product
information.

MOUNTING

Both a top & bottom mounting option is required for securing the grille to the outer frame.

Wire Hinge

B


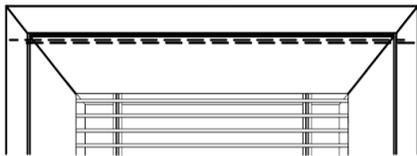


B - Wire Hinge mounting is for hinged access only, and grille face is connected to the outer filter frame.

B - Wire Hinge is only available for top mounting.

Nylon Thumb Screw



C

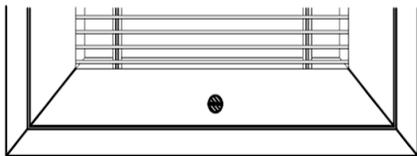

C - Nylon Thumb Screw mounting unscrews to open.

Nylon Screen Tabs



D

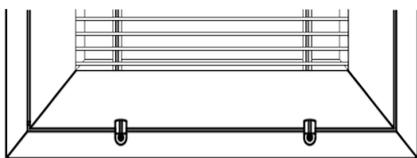

D - Nylon Screen Tab mounting quarter turns to open.

Security Screw

E

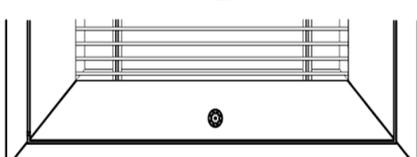

E - Security Key bit is required for access. The security key is available separately for order as a FG-KEY.



Scan for more
product
information.