



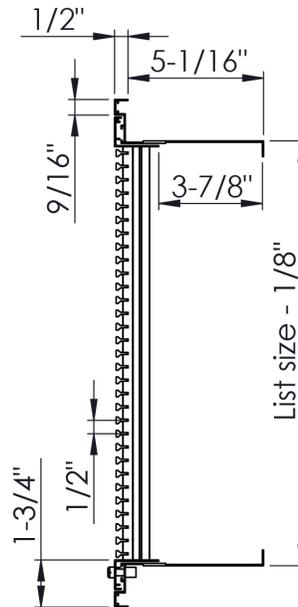

- Complements the appearance of our Bar Linear grilles.
- Fully-extruded, architectural aluminum construction.
- Fixed blades parallel to the length.
- Designed to fit a standard 4" filter depth.
- Available with durable powder coat finish.

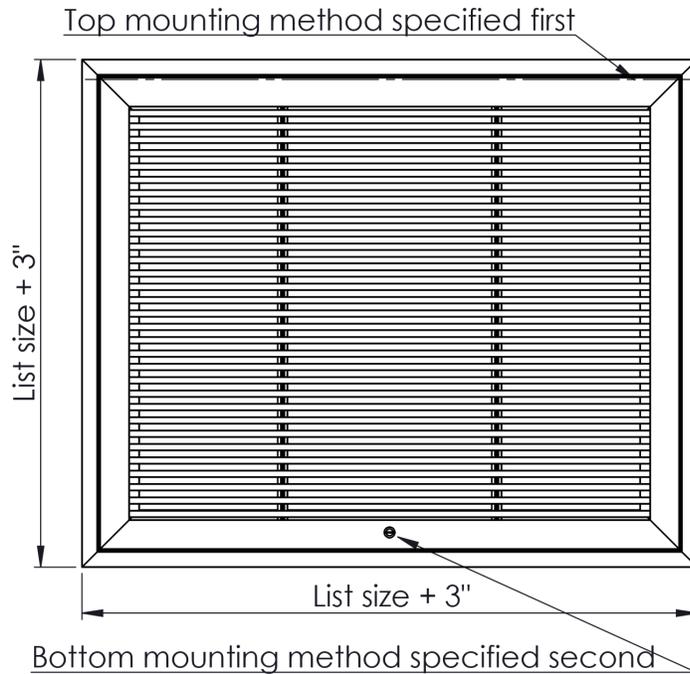

4" filter by others must be undersized by list-9/32".

**1. Specify Quantity**

**2. Specify the Length x Height Dimensions**

Available on 2" increments as standard. Custom sizes down to 1/16" increments.

\_\_\_\_\_ x \_\_\_\_\_  inches  mm

**3. Select a Blade Option**

- |  |   |
|--|---|
| <input type="checkbox"/> <u>00</u> - 0° Deflection   | <input type="checkbox"/> <u>30</u> - 30° Deflection |
| <input type="checkbox"/> <u>01</u> - 0° Pencil Proof | <input type="checkbox"/> <u>82</u> - 0° Air Flow    |
| <input type="checkbox"/> <u>15</u> - 15° Deflection  | <input type="checkbox"/> <u>84</u> - 0° Heel Proof  |

**4. Select a Top Mounting Option**

Optional to specify. B - Wire Hinge is standard.

**5. Select a Bottom Mounting Option**

Optional to specify. C - Nylon Thumb Screw is standard.

- |   |   |
|---|---|
| <input type="checkbox"/> <u>B</u> - Wire Hinge        | <input type="checkbox"/> <u>C</u> - Nylon Thumb Screw |
| <input type="checkbox"/> <u>C</u> - Nylon Thumb Screw | <input type="checkbox"/> <u>D</u> - Nylon Screen Tabs |
| <input type="checkbox"/> <u>D</u> - Nylon Screen Tabs | <input type="checkbox"/> <u>E</u> - Security Screw    |
| <input type="checkbox"/> <u>E</u> - Security Screw    |   |

**6. Select a Finish**

- W - White
- S - Silver
- M - Mill

**7. Select a Lead Time**

- 3 Day Ship
- Next Friday
- Standard Delivery



Project / Location:  
 Architect:  
 Engineer:  
 Contractor:




Scan for more product information.

## BLADE OPTIONS


**-00**

0° 13/64" blades on 1/2" centers

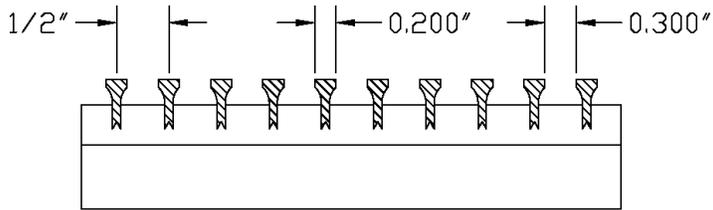


**-01**

0° 1/4" blades on 1/2" centers

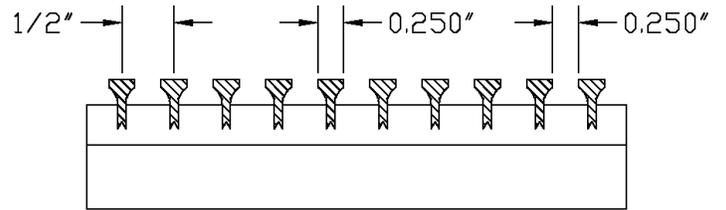


**-15**

15° 13/64" blades on 1/2" centers

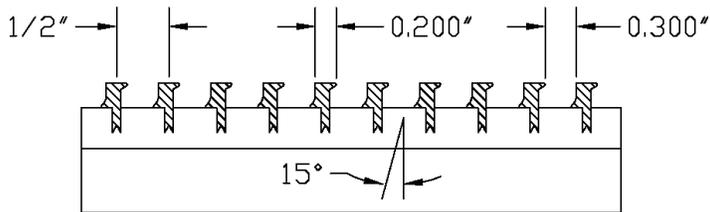


**-30**

30° 13/64" blades on 1/2" centers

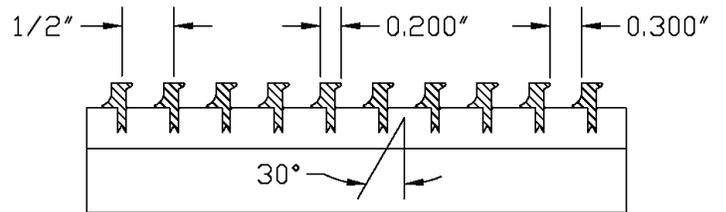


**-82**

0° 1/8" blades on 1/2" centers

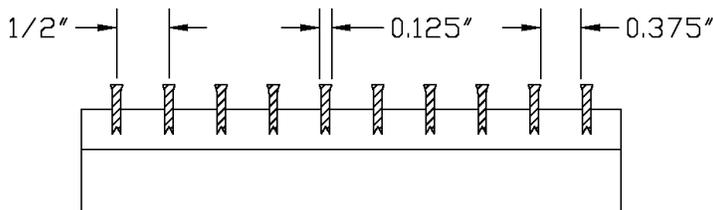

**-84**

0° 1/8" blades on 1/4" centers

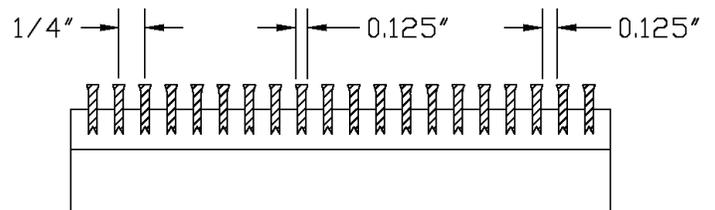



Scan for more  
product  
information.

## MOUNTING

Both a top & bottom mounting option is required for securing the grille to the outer frame.

Wire Hinge

**B**


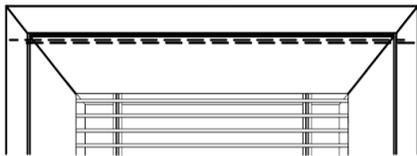


**B - Wire Hinge** mounting is for hinged access only, and grille face is connected to the outer filter frame.

B - Wire Hinge is only available for top mounting.

Nylon Thumb Screw



**C**

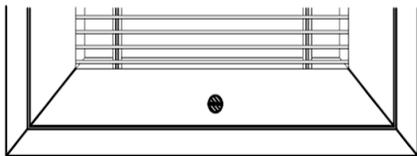

**C - Nylon Thumb Screw** mounting unscrews to open.

Nylon Screen Tabs



**D**

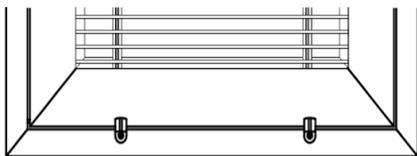

**D - Nylon Screen Tab** mounting quarter turns to open.

Security Screw

**E**

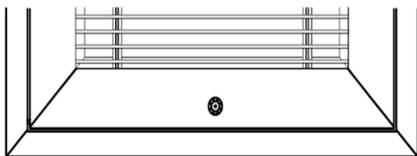

**E - Security Key** bit is required for access. The security key is available separately for order as a FG-KEY.



Scan for more  
product  
information.