



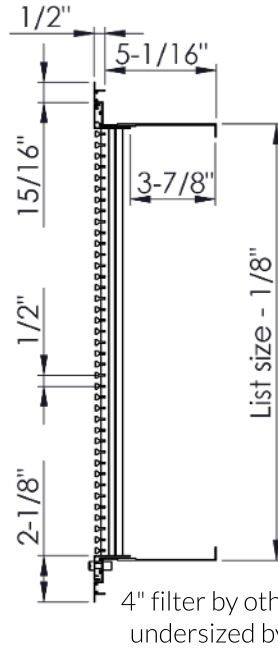

- Complements the appearance of our Bar Linear grilles.
- Fully-extruded, architectural aluminum construction.
- Outer frame designed to lay-in standard T-Bar ceilings.
- Fixed blades parallel to the length.
- Designed to fit a standard 4" filter depth.
- Available with durable powder coat finish.

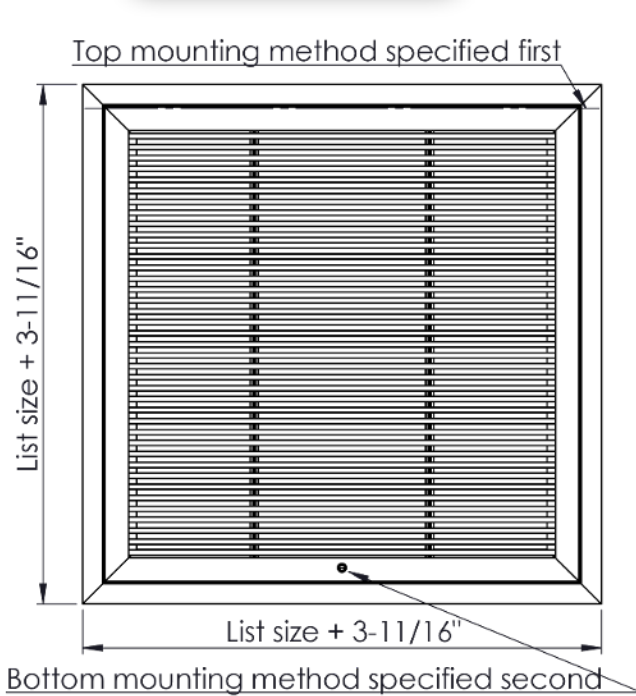

Order 4" smaller than the
T-Bar opening.

e.g. a 20" x 20"
DABL-FG4-TB grille will fit a
standard 2'x2' T-Bar opening.

4" filter by others must be
undersized by list-9/32".

1. Specify Quantity

2. Specify the Length x Height Dimensions

Available on 2" increments as standard. Custom sizes down to 1/16" increments.

_____ x _____ ☐ inches ☐ mm

3. Select a Blade Option

- | | |
|--|---|
| ☐ <u>00</u> - 0° Deflection | ☐ <u>30</u> - 30° Deflection |
| ☐ <u>01</u> - 0° Pencil Proof | ☐ <u>82</u> - 0° Air Flow |
| ☐ <u>15</u> - 15° Deflection | ☐ <u>84</u> - 0° Heel Proof |

4. Select a Top Mounting Option

Optional to specify. B - Wire Hinge is standard.

- ☐ B - Wire Hinge
☐ C - Nylon Thumb Screw
☐ D - Nylon Screen Tabs
☐ E - Security Screw

5. Select a Bottom Mounting Option

Optional to specify. C - Nylon Thumb Screw is standard.

- ☐ B - Wire Hinge
☐ C - Nylon Thumb Screw
☐ D - Nylon Screen Tabs
☐ E - Security Screw

6. Select a Finish

- ☐ W - White
☐ S - Silver
☐ M - Mill

7. Select a Lead Time

- ☐ 3 Day Ship
☐ Next Friday
☐ Standard Delivery

**3 DAY
SHIP**
ANY SIZE. ANY MODEL.
GUARANTEED

Project / Location:

Architect:

Engineer:

Contractor:




Scan for more
product
information.

BLADE OPTIONS


-00

0° 13/64" blades on 1/2" centers

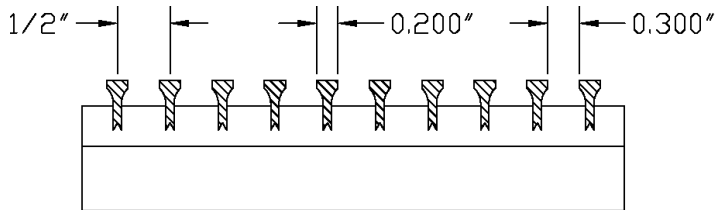


-01

0° 1/4" blades on 1/2" centers

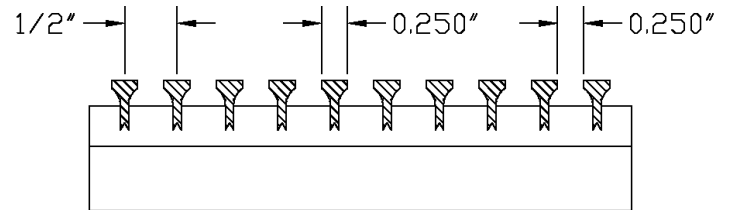


-15

15° 13/64" blades on 1/2" centers

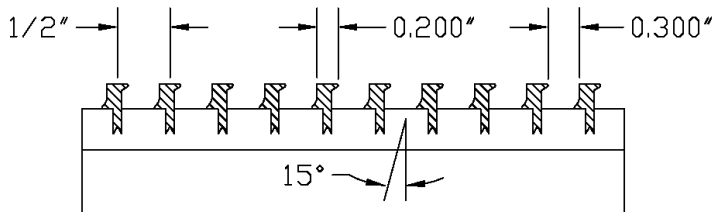


-30

30° 13/64" blades on 1/2" centers

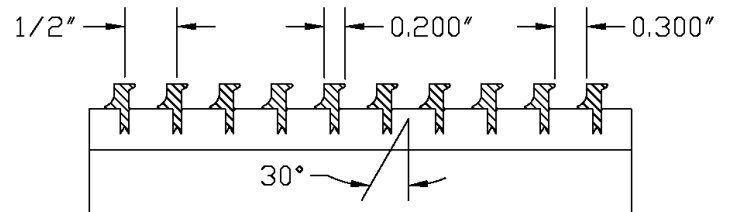


-82

0° 1/8" blades on 1/2" centers

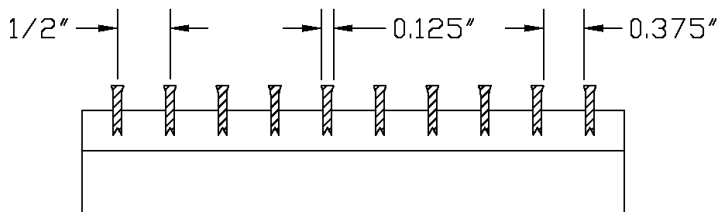

-84

0° 1/8" blades on 1/4" centers

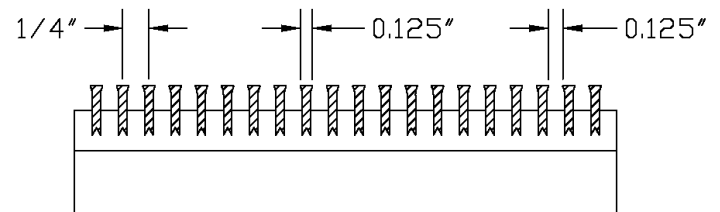



Scan for more
product
information.

MOUNTING

Both a top & bottom mounting option is required for securing the grille to the outer frame.

Wire Hinge

B


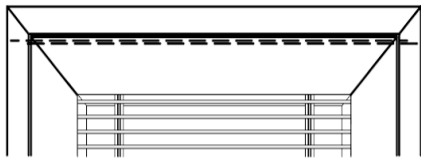


B - Wire Hinge mounting is for hinged access only, and grille face is connected to the outer filter frame.

B - Wire Hinge is only available for top mounting.

Nylon Thumb Screw



C

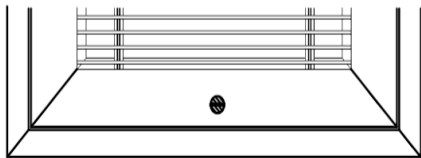

C - Nylon Thumb Screw mounting unscrews to open.

Nylon Screen Tabs



D

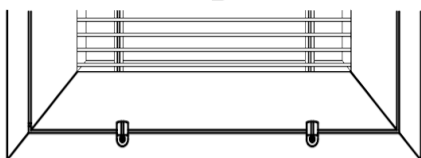

D - Nylon Screen Tab mounting quarter turns to open.

Security Screw

E

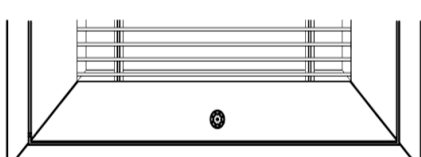

E - Security Key bit is required for access. The security key is available separately for order as a FG-KEY.



Scan for more
product
information.