
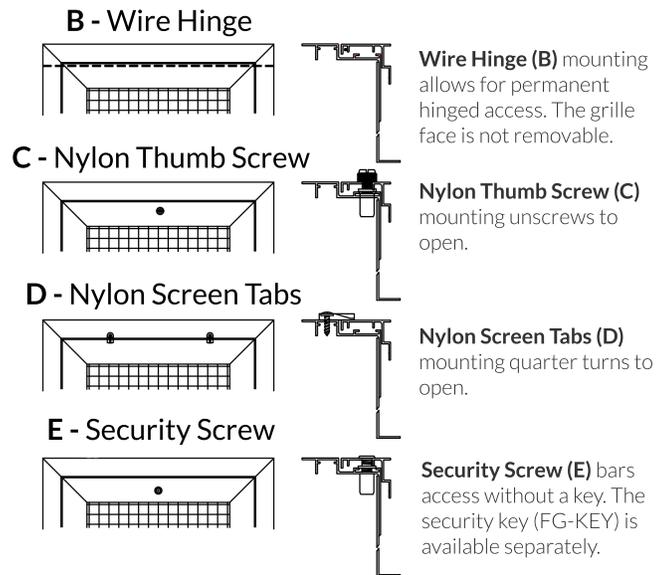


- Horizontal blades fixed on 30° deflection and 2/3" spacing.
- Aluminum roll-formed blade pressure fitted for rattle-free performance.
- Aluminum extruded frame with mechanically locked corners.
- Countersunk screw holes c/w painted mounting screws.
- Mullions used for lengths over 22".
- Designed for sidewall and ceiling application.
- Durable powder coat finish.

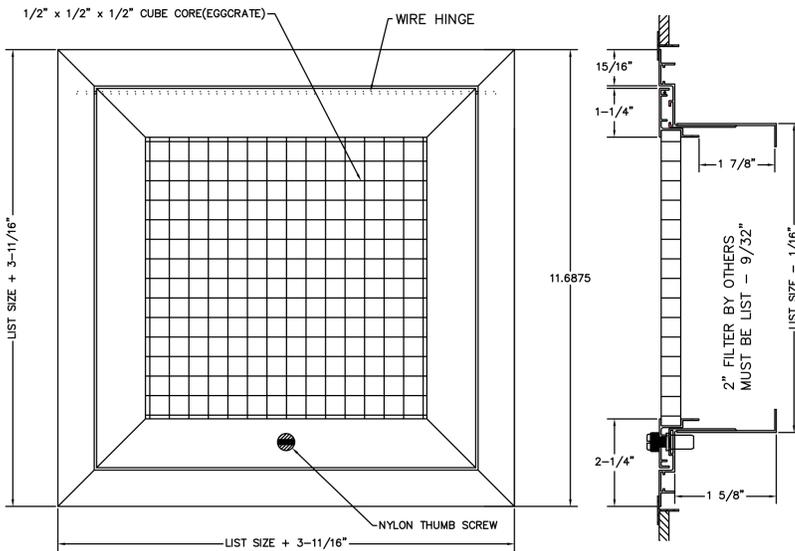

1. Specify Quantity

2. Specify the Length x Height Dimensions

Available on 2" increments as standard. Custom sizes down to 1/16" increments.

_____ x _____ inches mm

Order 4" smaller than the T-Bar opening.

e.g. a 20" x 20" DARE5-FG-TB grille will fit a standard 2'x2' T-Bar opening.

3. Select a Top Mounting Option

Optional to specify. B - Wire Hinge is standard.

- B - Wire Hinge
- C - Nylon Thumb Screw
- D - Nylon Screen Tabs
- E - Security Screw

4. Select a Bottom Mounting Option

Optional to specify. C - Nylon Thumb Screw is standard.

- B - Wire Hinge
- C - Nylon Thumb Screw
- D - Nylon Screen Tabs
- E - Security Screw

5. Select a Finish

- W - White
- S - Silver
- M - Mill

6. Select a Lead Time

- 3 Day Ship
- Next Friday
- Standard Delivery

3 DAY SHIP
ANY SIZE. ANY MODEL.
GUARANTEED

Project / Location:

Architect:

Engineer:

Contractor:



Scan for more product information.