


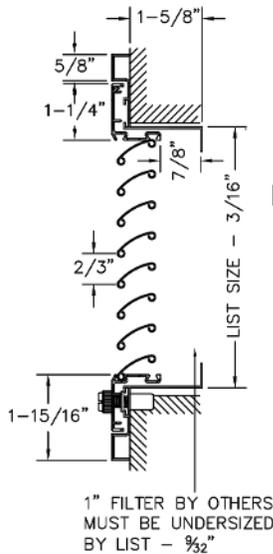


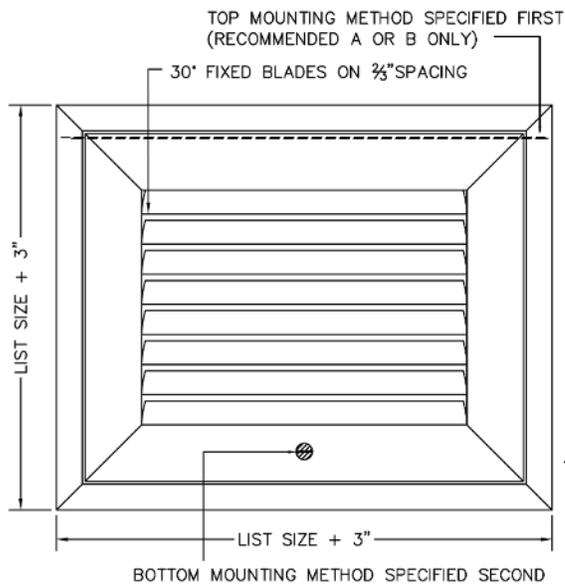

- Horizontal blades fixed on 30° deflection with 2/3" spacing.
- Aluminum roll-formed blade pressure fitted for rattle-free performance.
- Designed to fit a standard 1" filter depth.
- High-quality aluminum extruded frames.
- Mullions used for sizes over 22" in length.
- Available with durable powder coat finish.





Spring Pins (A)





Spring Pin (A) mounting allows for hinged access and a fully removable grille face.

Wire Hinge (B)





Wire Hinge (B) mounting allows for permanent hinged access. The grille face is not removable.

Nylon Thumb Screw (C)




Nylon Thumb Screw (C) mounting unscrews to open.

Nylon Screen Tabs (D)



Nylon Screen Tabs (D) mounting quarter turns to open.

Security Screw (E)



Security Screw (E) bars access without a key. The security key (FG-KEY) is available separately.

1. Specify Quantity

2. Specify the Length x Height Dimensions

Available on 2" increments as standard. Custom sizes down to 1/16" increments.

_____ x _____ inches mm

3. Select a Top Mounting Option

- A** - Spring Pins
- B** - Wire Hinge
- C** - Nylon Thumb Screw
- D** - Nylon Screen Tabs
- E** - Security Screw

4. Select a Bottom Mounting Option

- A** - Spring Pins
- B** - Wire Hinge
- C** - Nylon Thumb Screw
- D** - Nylon Screen Tabs
- E** - Security Screw

5. Select a Finish

- W** - White
- S** - Silver
- M** - Mill

6. Select a Lead Time

- 3 Day Ship
- Next Friday
- Standard Delivery



Additional Options

- D** - Opposed Blade Damper

Project / Location:

Architect:

Engineer:

Contractor:



Scan for more product information.