




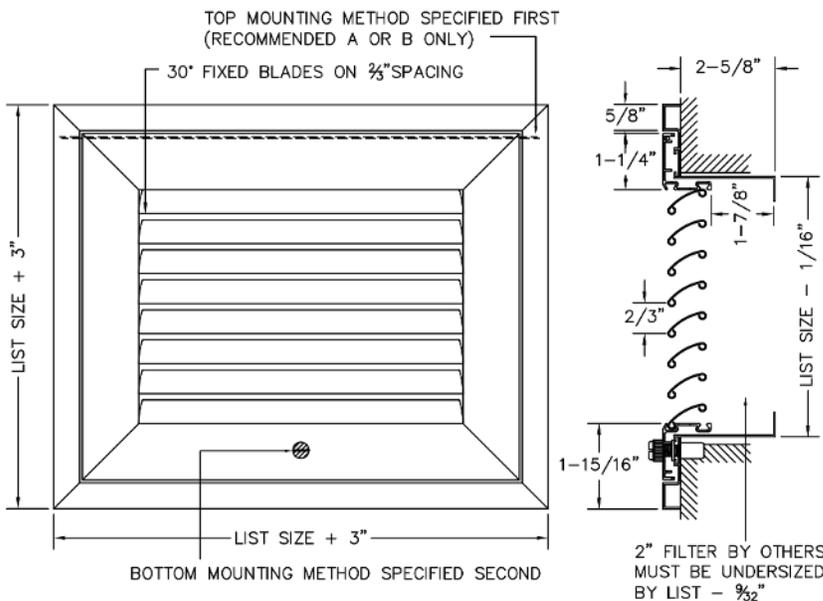

- Horizontal blades fixed on 30° deflection with 2/3" spacing.
- Aluminum roll-formed blade pressure fitted for rattle free performance.
- Designed to fit a standard 2" filter depth.
- High quality aluminum extruded frames.
- Mullions used for sizes over 22" in length.
- Available with durable powder coat finish.




A - Spring Pins




Spring Pin (A) mounting allows for hinged access and a fully removable grille face.

B - Wire Hinge





Wire Hinge (B) mounting allows for permanent hinged access. The grille face is not removable.

C - Nylon Thumb Screw





Nylon Thumb Screw (C) mounting unscrews to open.

D - Nylon Screen Tabs



Nylon Screen Tabs (D) mounting quarter turns to open.

E - Security Screw



Security Screw (E) bars access without a key. The security key (FG-KEY) is available separately.

1. Specify Quantity

2. Specify the Length x Height Dimensions

Available on 2" increments as standard. Custom sizes down to 1/16" increments.

_____ x _____ inches mm

3. Select a Top Mounting Option

- A - Spring Pins
- B - Wire Hinge
- C - Nylon Thumb Screw
- D - Nylon Screen Tabs
- E - Security Screw

4. Select a Bottom Mounting Option

- A - Spring Pins
- B - Wire Hinge
- C - Nylon Thumb Screw
- D - Nylon Screen Tabs
- E - Security Screw

5. Select a Finish

- W - White
- S - Silver
- M - Mill

6. Select a Lead Time

- 3 Day Ship
- Next Friday
- Standard Delivery



Additional Options

- D - Opposed Blade Damper

Project / Location:

Architect:

Engineer:

Contractor:



Scan for more product information.