




- Horizontal blades fixed on 30° deflection with 2/3" spacing.
- Aluminum roll-formed blade pressure fitted for rattle-free performance.
- Designed to fit a standard 4" filter depth.
- High-quality aluminum extruded frames.
- Mullions used for sizes over 22" in length.
- Available with durable powder coat finish.

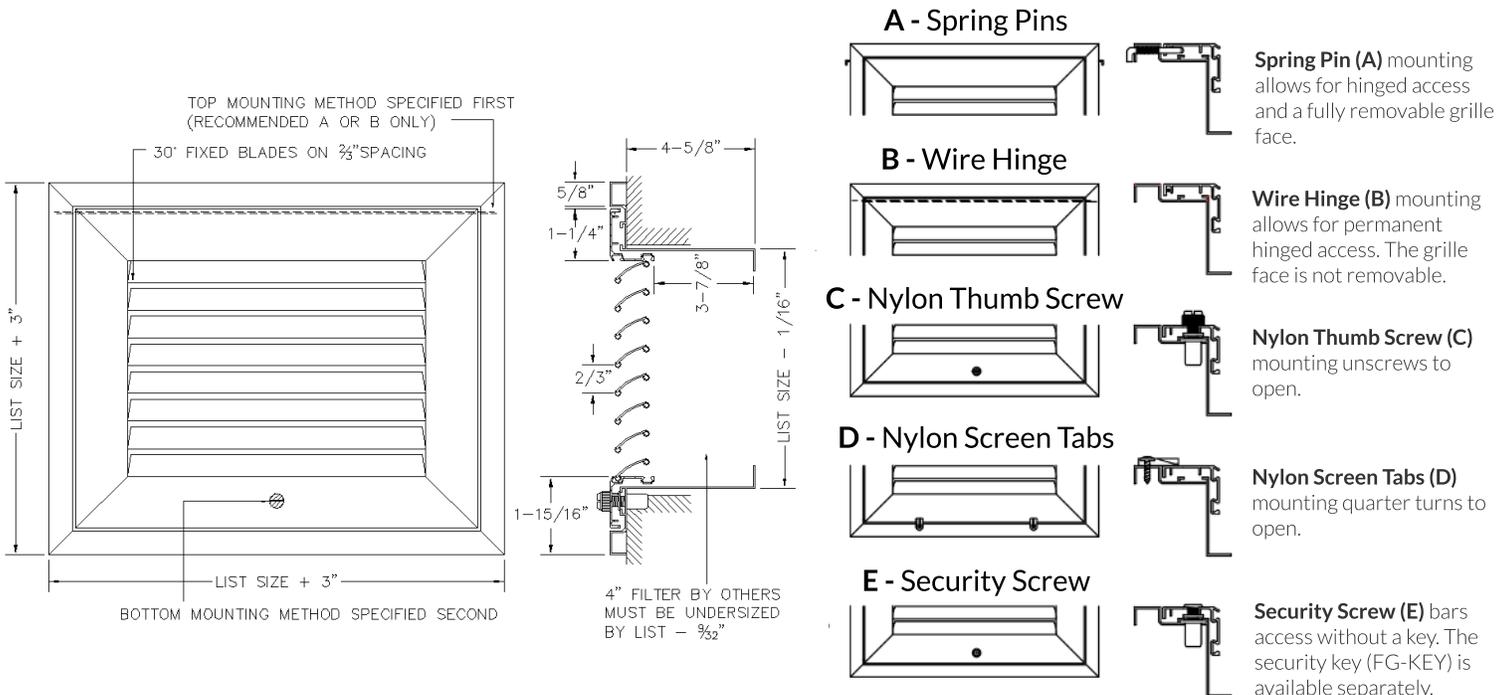

**1. Specify Quantity**

\_\_\_\_\_

**2. Specify the Length x Height Dimensions**

Available on 2" increments as standard. Custom sizes down to 1/16" increments.

\_\_\_\_\_ x \_\_\_\_\_  inches  mm

**3. Select a Top Mounting Option**

- A - Spring Pins
- B - Wire Hinge
- C - Nylon Thumb Screw
- D - Nylon Screen Tabs
- E - Security Screw

**4. Select a Bottom Mounting Option**

- A - Spring Pins
- B - Wire Hinge
- C - Nylon Thumb Screw
- D - Nylon Screen Tabs
- E - Security Screw



**Additional Options**

- D - Opposed Blade Damper

**5. Select a Finish**

- W - White
- S - Silver
- M - Mill

**6. Select a Lead Time**

- 3 Day Ship
- Next Friday
- Standard Delivery

**Project / Location:**

**Architect:**

**Engineer:**

**Contractor:**



Scan for more product information.