

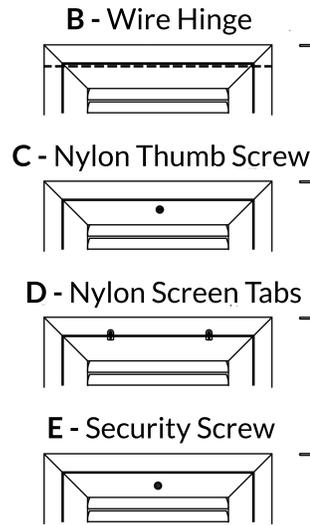


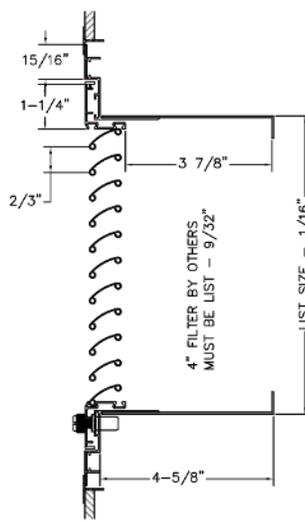

- Horizontal blades fixed on 30° deflection and 2/3" spacing.
- Aluminum roll-formed blade pressure fitted for rattle-free performance.
- Outer frame designed to lay-in standard T-Bar ceilings.
- Designed to fit a standard 4" filter depth.
- High quality aluminum extruded frames.
- Mullions used for sizes over 22" in length.
- Available with durable powder coat finish.

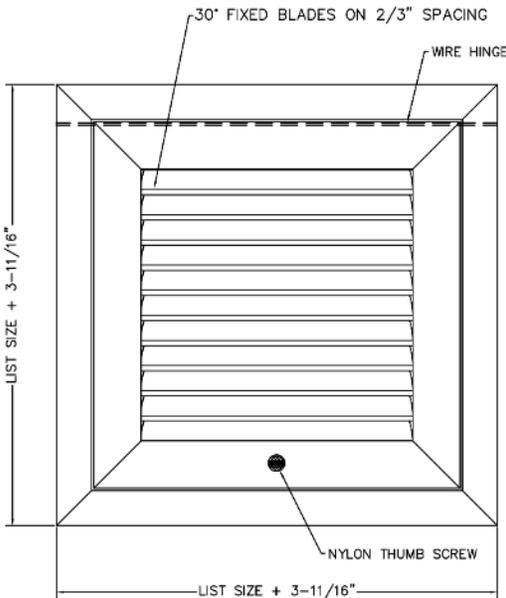

**Wire Hinge (B)** mounting allows for permanent hinged access. The grille face is not removable.

**Nylon Thumb Screw (C)** mounting unscrews to open.

**Nylon Screen Tabs (D)** mounting quarter turns to open.

**Security Screw (E)** bars access without a key. The security key (FG-KEY) is available separately.

**1. Specify Quantity**

\_\_\_\_\_

**2. Specify the Length x Height Dimensions**

Available on 2" increments as standard. Custom sizes down to 1/16" increments.

\_\_\_\_\_ x \_\_\_\_\_  inches  mm

Order 4" smaller than the T-Bar opening.

e.g. a 20" x 20" DARE5-FG-TB grille will fit a standard 2'x2' T-Bar opening.

**3. Select a Top Mounting Option**

Optional to specify. B - Wire Hinge is standard.

- B - Wire Hinge
- C - Nylon Thumb Screw
- D - Nylon Screen Tabs
- E - Security Screw

**4. Select a Bottom Mounting Option**

Optional to specify. C - Nylon Thumb Screw is standard.

- B - Wire Hinge
- C - Nylon Thumb Screw
- D - Nylon Screen Tabs
- E - Security Screw

**5. Select a Finish**

- W - White
- S - Silver
- M - Mill

**6. Select a Lead Time**

- 3 Day Ship
- Next Friday
- Standard Delivery



**Project / Location:**  
**Architect:**  
**Engineer:**  
**Contractor:**



Scan for more product information.