
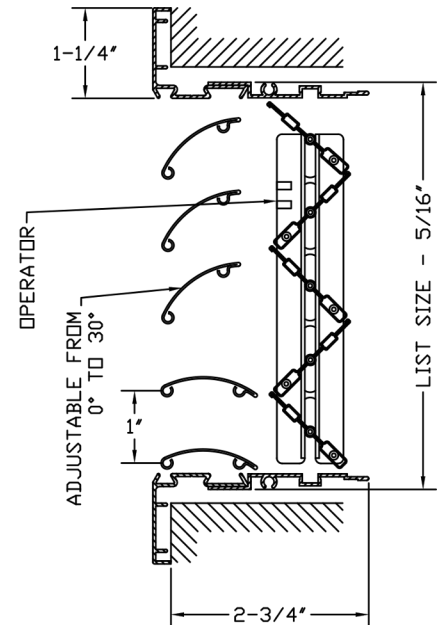


- Adjustable blades from 0° to 30° deflection with 1" spacing.
- Opposed blade damper with slide operator.
- Roll-formed aluminum blades provide a stylish appearance.
- Pressure-fit nylon pivot pins provide rattle free performance.
- High quality aluminum extruded frame.
- Countersunk #6 screw hole mounting c/w painted screws.
- Mullions used for sizes over 22" in length.
- Available on 2" increments as standard. Custom sizes available down to 1/16" increments.
- Available with durable powder coat finish.

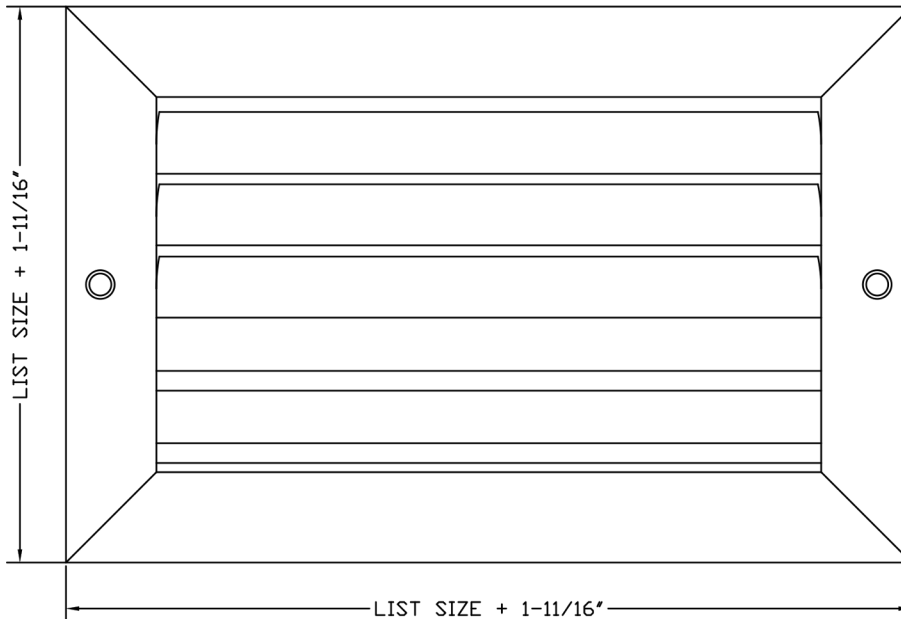

**3 DAY
SHIP**
ANY SIZE. ANY MODEL.
GUARANTEED

Additional Options

- ☐ TB - No Screw Holes
- ☐ IS - Insect Screen
- ☐ AA - All Aluminum

1. Specify the Length x Height Dimensions

☐ Inches ☐ MM _____ x _____

2. Select a Finish

- ☐ W - White
- ☐ S - Silver
- ☐ M - Mill

3. Select a Lead Time

- ☐ 3 Day Ship
- ☐ Next Friday
- ☐ Standard Delivery

Project / Location: _____

Architect: _____

Engineer: _____

Contractor: _____