How to Specify Bar Linear

The following information is required for your order:

DABL _ _ _ _ _ - _ _ - _ LENGTH x HEIGHT - FINISH - LEAD TIME

1. 2. 3. 4. 5. 6.

1. Specify MODEL Options

See pages S91-S116 for model options.
Only specify if applicable. None required.

- D – Damper
- C – Core Only
- R – Removable Core
- F - Floor Reinforcement
- N – No Flange
- H – Hidden Flange
- J – Mud-In Frame

2. Select the BLADE Option

See page S88 for further detail.

- -00 – 0° – 13/64" Blade on 1/2" Centers
- -01 – 0° Pencil Proof – 1/4" Blade on 1/2" Centers
- -15 – 15° – 13/64" Blade on 1/2" Centers
- -30 – 30° – 13/64" Blade on 1/2" Centers
- -82 – 0° Air Flow – 1/8" Blade on 1/2" Centers
- -84 – 0° Heel Proof (1/8") on 1/4" Centers

3. Select the MOUNTING Option

See S89 for further detail.

- -A – Screw Holes
- -B – Spring Clips (for Floor and Sill only)
- -C – Concealed Brackets
- -D – Sidewall Scre Hole (only available with Removable Core)
- -TB – No Mounting Option

4. Specify the LENGTH x HEIGHT

- Order size/list size is always the size of the opening.
- Always specify Length first, Height second.
- Standard sizes are available on 1/2" increments.
- Custom sizes are available on 1/16" increments.
- Lengths over 84" will be made in open-ended sections with aligning pins provided

5. Specify the FINISH

- Standard Finish:
  - White
  - Silver
  - Mill
  - Brown
- See Dayus' Finish Chart page iii for further detail.

6. Select a LEAD TIME

- All models are available with 3 Day, Next Friday, or Standard shipping plans.

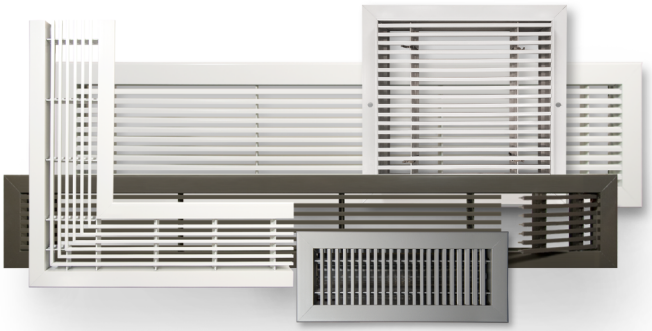

Phone: (519) 737-1199 Fax: (519) 737-1831 Email: mail@dayus.com Web: www.dayus.com
5290 Pulleyblank St., RR#1 Windsor, Ontario N9G 0B8