

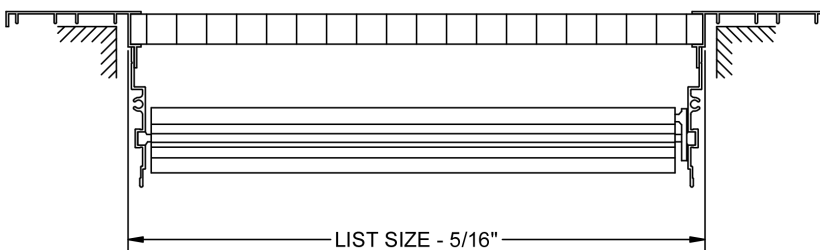


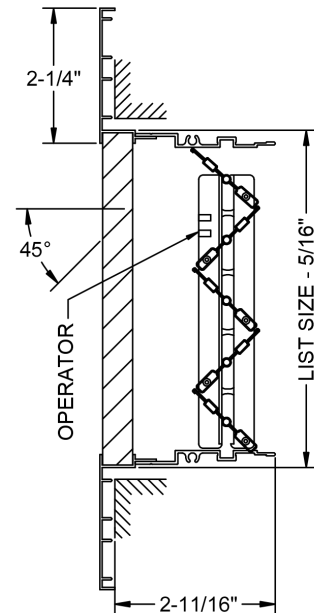

- Wide flange for additional surface coverage.
- 1/2" x 1/2" x 1/2" aluminum eggcrate core with 45° deflection.
- Opposed blade damper with slide operator.
- High-quality aluminum extruded frame.
- Countersunk #6 screw hole mounting c/w painted screws.
- Mullions used for sizes over 48" in length.
- Finished with a durable white powder coat paint.

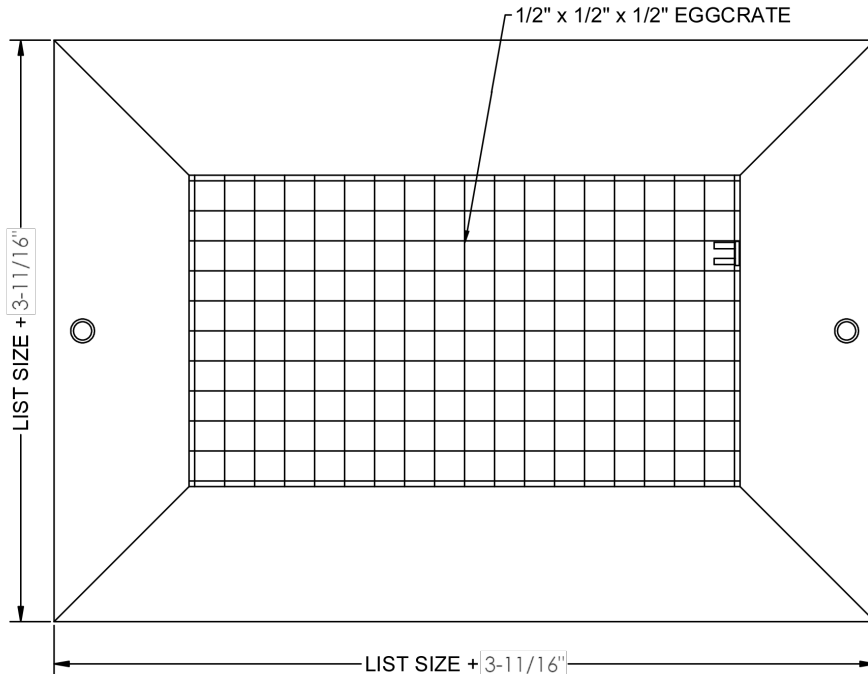

1. Specify Quantity

2. Specify the Length x Height Dimensions

Available on 2" increments as standard. Custom sizes down to 1/16" increments.

_____ x _____ ☐ inches ☐ mm

3. Select a Finish

☐ W - White

4. Select a Lead Time

- ☐ 3 Day Ship
☐ Next Friday
☐ Standard Delivery

Additional Options

- ☐ TB - No Screw Holes
☐ AA - All Aluminum

Project / Location:

Architect:

Engineer:

Contractor:



Scan for more
product
information.