


DAC33D-WF

Three Direction Curved Blade Register w/ Wide Flange



- Wide flange for additional surface coverage.
- Horizontal and vertical, adjustable curved blades with 1" spacing.
- Opposed blade damper with slide operator.
- Pressure-fit nylon pivot pins provide rattle-free performance.
- High-quality aluminum extruded frame and roll-formed aluminum blades.
- Countersunk #6 screw hole mounting c/w painted screws.
- Mullions used for sizes over 22" in length.
- Available on 2" increments as standard. Custom sizes available down to 1/16" increments.
- Available with durable powder coat finish.

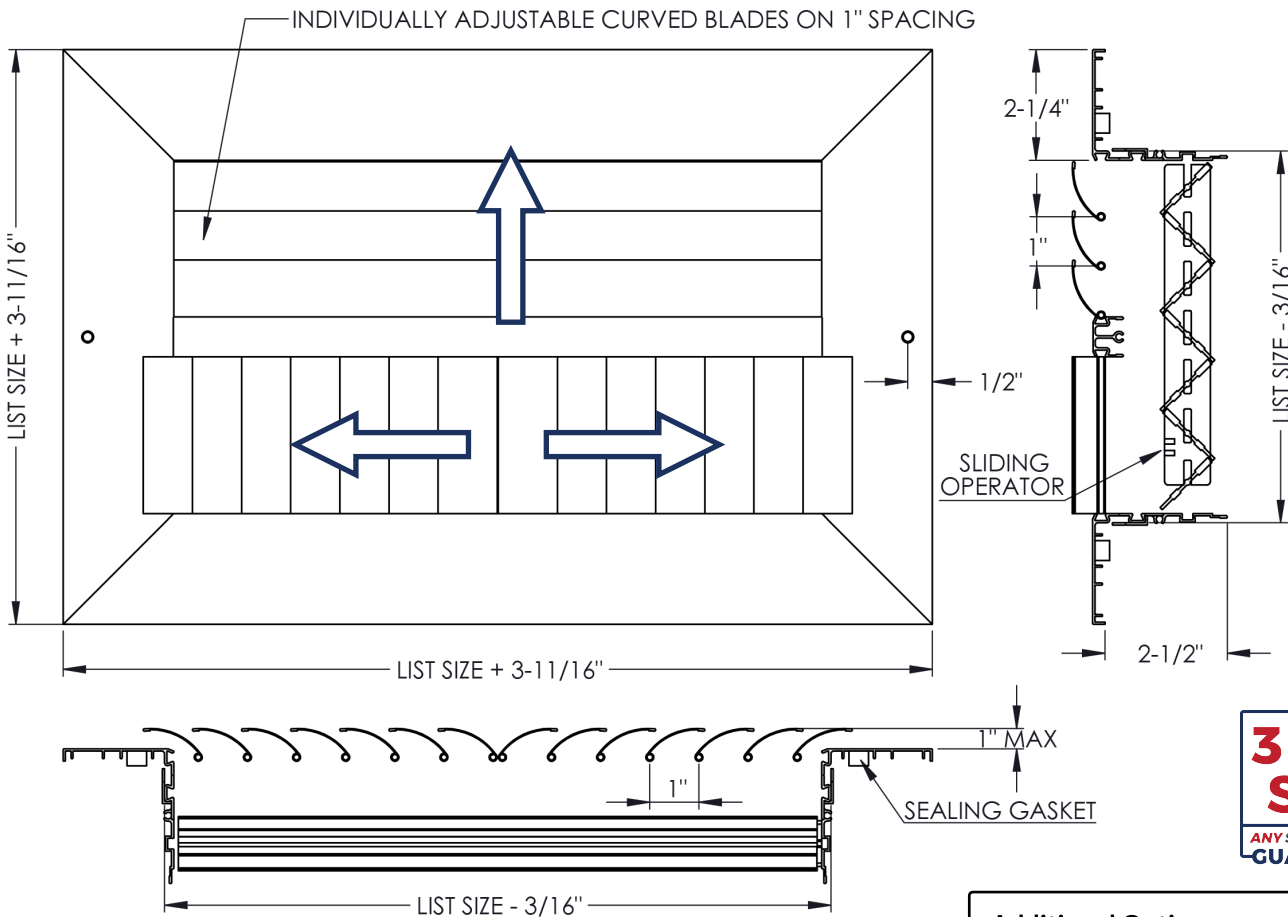

3 DAY SHIP
ANY SIZE. ANY MODEL.
GUARANTEED

1. Specify the Length x Height Dimensions

Inches MM _____ x _____

2. Select a Finish

- W - White
 S - Silver
 M - Mill

3. Select a Lead Time

- 3 Day Ship
 Next Friday
 Standard Delivery


Additional Options

- TB - No Screw Holes
 AA - All Aluminum

Project / Location: _____
 Architect: _____
 Engineer: _____
 Contractor: _____


BLADE OPTIONS

Standard
No additional option

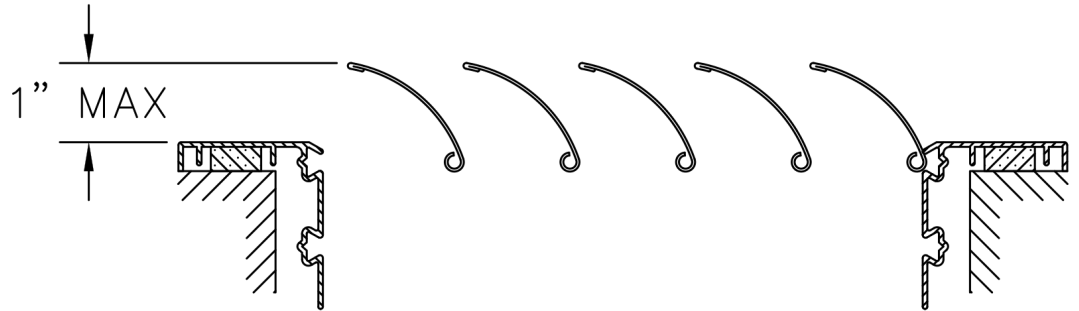

Standard Blade option can extend up to 1" out of the frame.

-R
Recessed Blades

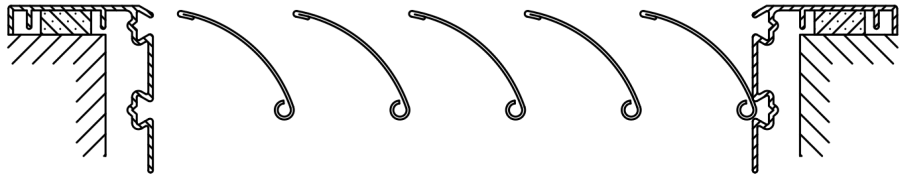

-F
Fixed Blades

