


- Wide flange for additional surface coverage.
- Opposed blade damper with slide operator.
- Horizontal blades fixed on 45° deflection with 3/4" spacing.
- Constructed with high-quality, fully-extruded aluminum with blades designed for high efficiency.
- All supports are hidden behind blades for a continuous appearance.
- Countersunk #6 screw hole mounting c/w painted screws.
- Available on 2" increments as standard. Custom sizes available down to 1/16" increments.
- Available with durable powder coat finish.

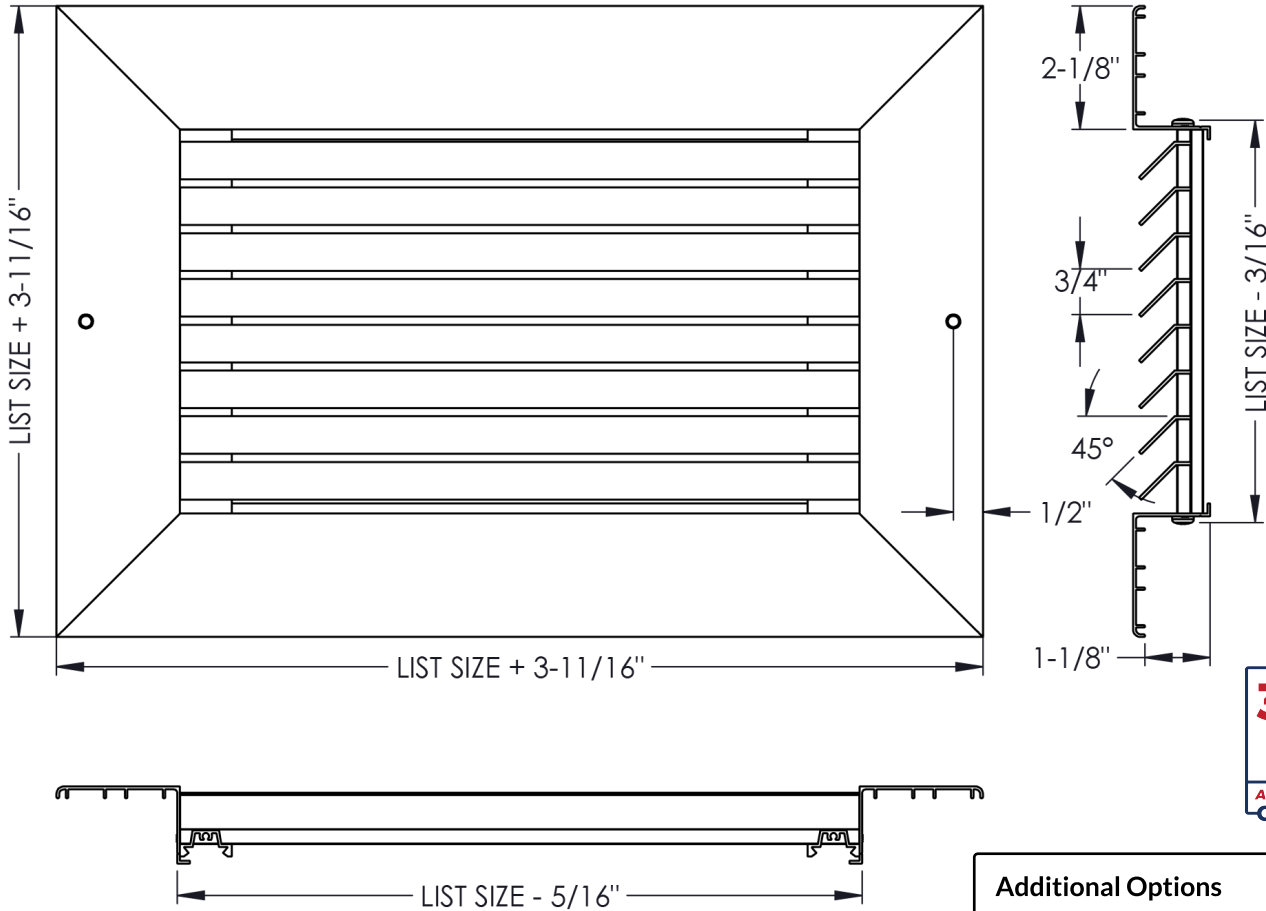

3 DAY SHIP
ANY SIZE. ANY MODEL.
GUARANTEED

Additional Options

- TB** - No Screw Holes
- BS** - Bird Screen
- IS** - Insect Screen
- AA** - All Aluminum

1. Specify the Length x Height Dimensions

Inches MM _____ x _____

2. Select a Finish

- W** - White
- S** - Silver
- B** - Brown
- M** - Mill
- FB** - Flat Black
- Special:** _____

3. Select a Lead Time

- 3 Day Ship
- Next Friday
- Standard Delivery

Project / Location: _____

Architect: _____

Engineer: _____

Contractor: _____