

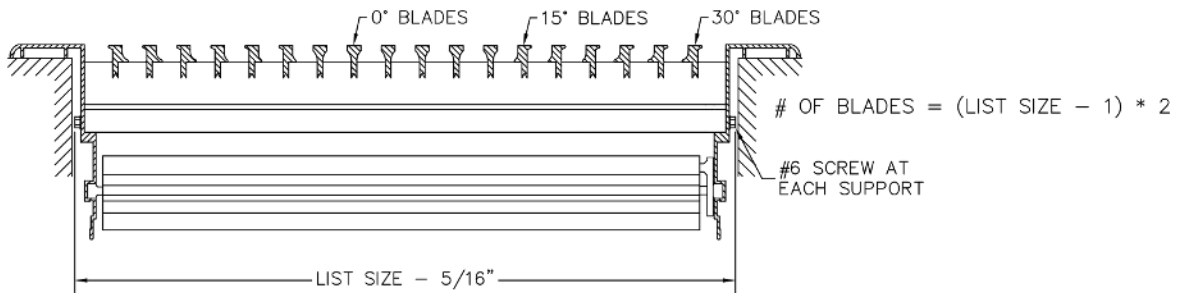


## DAFD | Floor Bar Linear Register

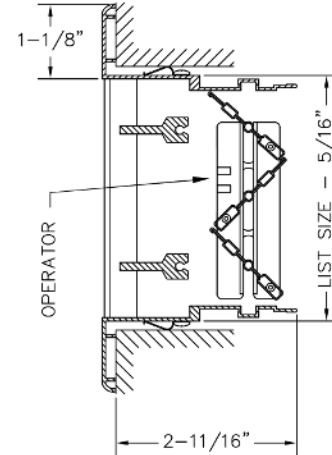

- Fully extruded, high quality aluminum construction for a stylish appearance.
- Blade deflection transitions from 0°, 15° and 30° for wider air distribution.
- Reinforced core designed for floor applications.
- Opposed blade damper with slide operator.
- Fixed blades parallel to the short dimension.
- Available with durable powder coat finish.

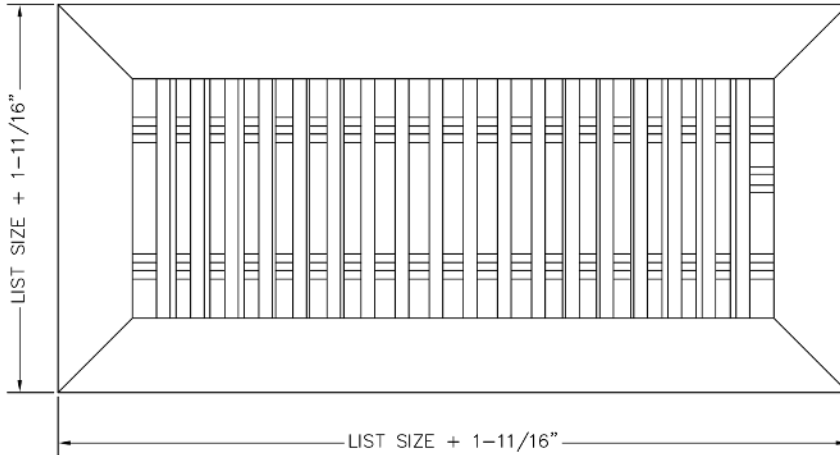

**1. Specify Quantity**

\_\_\_\_\_

**2. Specify the Length**

(3" - 8") Lengths available on 1/2" increments as standard. Custom sizes available down to 1/16" increments.

\_\_\_\_\_  inches  mm

**3. Select a Height**

- 8"       16"  
 10"      18"  
 12"  
 14"

**4. Select a Finish**

- W - White       FB - Flat Black  
 S - Silver       Special:  
 B - Brown      \_\_\_\_\_  
 M - Mill



**5. Select a Lead Time**

- 3 Day Ship  
 Next Friday  
 Standard Delivery

**Alternative Mounting Options**  
B - Spring Clips are standard. Select only if an alternative mounting option is preferred:

A - Screw Holes  
 IB - No Mounting

**Project / Location:**

**Architect:**

**Engineer:**

**Contractor:**




Scan for more product information.

### BLADE OPTIONS


**-00**

0° 13/64" blades on 1/2" centers

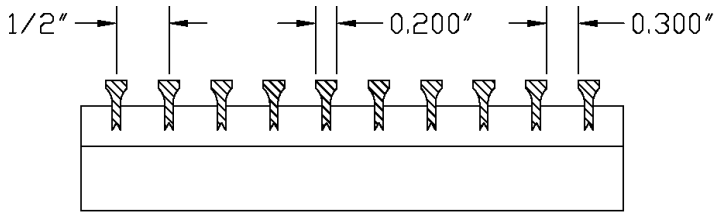


**-01**

0° 1/4" blades on 1/2" centers

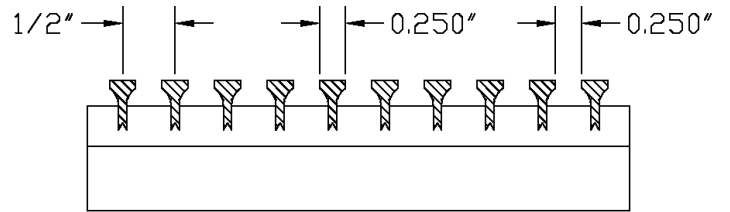


**-15**

15° 13/64" blades on 1/2" centers

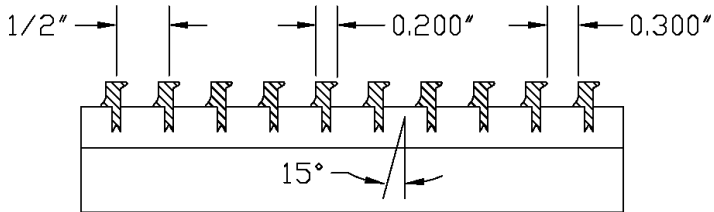


**-30**

30° 13/64" blades on 1/2" centers

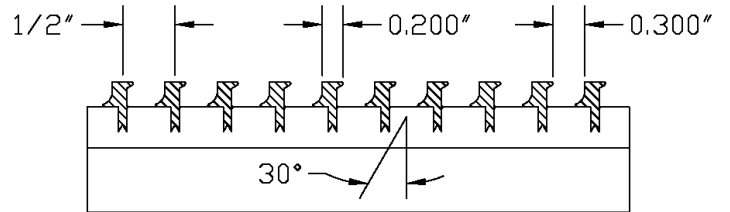


**-82**

0° 1/8" blades on 1/2" centers

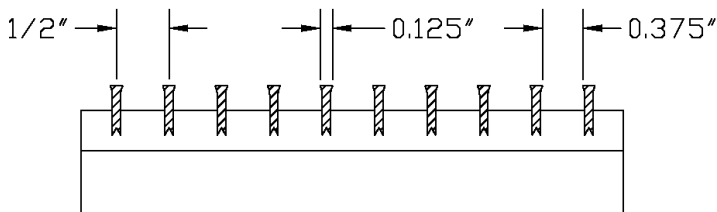

**-84**

0° 1/8" blades on 1/4" centers

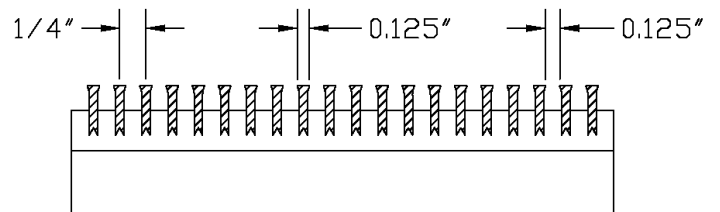


Scan for more product information.

### MOUNTING

**-A**


Screw Holes

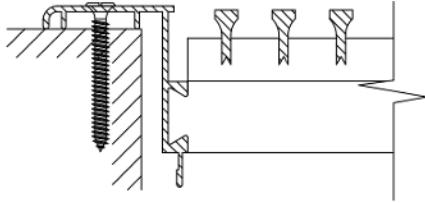

Color matched screws with countersunk screw holes.

**-B**


Spring Clips

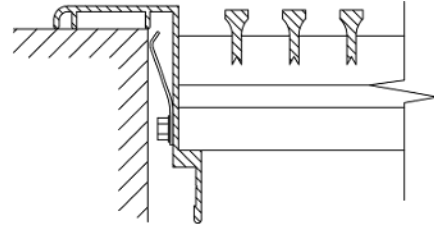

Hidden clips behind the flange to keep the grille secure in the opening. Only suitable for floor & sill applications.

**-C**


Concealed Brackets

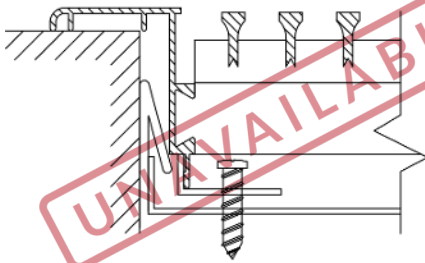

Product is fastened to duct-mounted brackets, which are concealed behind the blades.

**-D**


Sidewall Screw Holes

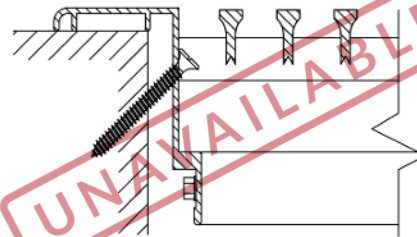

Screw holes are drilled at a 45° angle on inner flange. Only available with Removable Core.

**-TB**

No Mounting

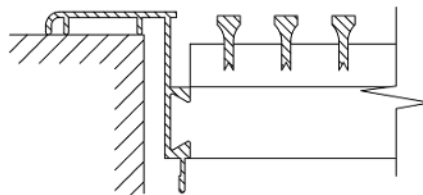

Designed for lay-in ceiling and custom applications. For lay-in, order 2" under to account for flange.

e.g. 22" x 10" will have O.D. 23-11/16" x 11-11/16" and fit a standard 24" x 12" T-bar opening.



Scan for more product information.