
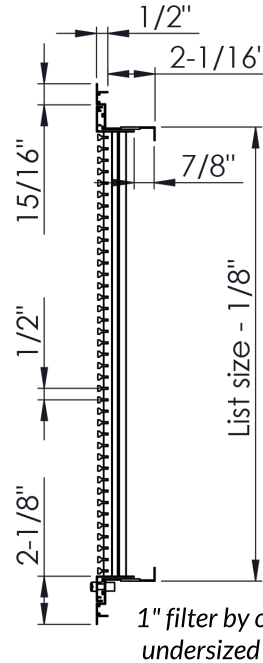


- Complements the appearance of our Bar Linear grilles.
- Fully-extruded, architectural aluminum construction.
- Outer frame designed to lay-in standard T-Bar ceilings.
- Fixed blades parallel to the length.
- Designed to fit a standard 1" filter depth.
- Available on 2" increments as standard. Custom sizes available down to 1/16" increments.
- Available with durable powder coat finish.

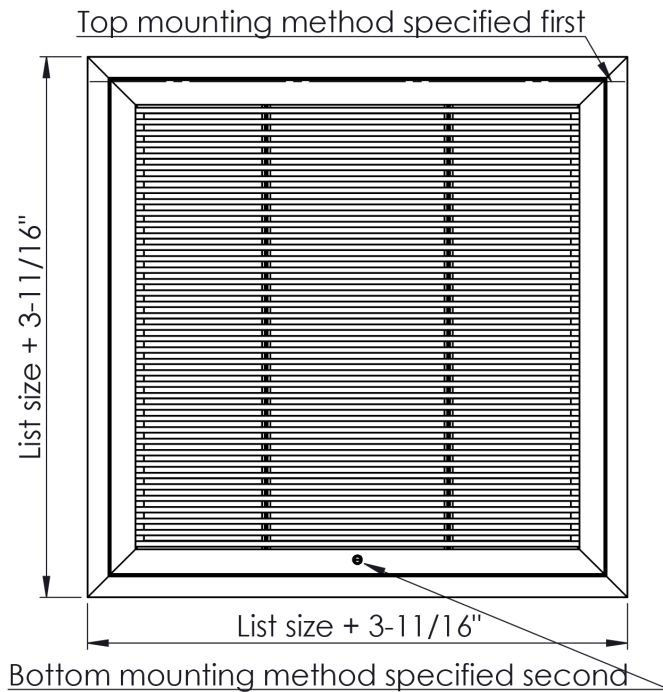

Order 4" smaller than the T-Bar opening.  
e.g. a 20" x 20" DABL-FG-TB grille will fit a standard 2'x2' T-Bar opening.

1" filter by others must be undersized by list-9/32".

### 1. Select a Blade Option

- 00 - 0° Deflection
- 01 - 0° Pencil Proof
- 15 - 15° Deflection
- 30 - 30° Deflection
- 82 - 0° Air Flow
- 84 - 0° Heel Proof

### 2. Select a Top Mounting Option

- B - Wire Hinge
- C - Nylon Thumb Screw
- D - Nylon Screen Tabs
- E - Security Screw

### 3. Select a Bottom Mounting Option

- B - Wire Hinge
- C - Nylon Thumb Screw
- D - Nylon Screen Tabs
- E - Security Screw

### 4. Specify the Length x Height Dimensions

Inches  MM \_\_\_\_\_ x \_\_\_\_\_

### 5. Select a Finish

- W - White
- S - Silver
- M - Mill

### 6. Select a Lead Time

- 3 Day Ship
- Next Friday
- Standard Delivery

Qty \_\_\_\_\_




Project / Location: \_\_\_\_\_  
 Architect: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Contractor: \_\_\_\_\_

## BLADE OPTIONS


**-00**

0° 13/64" blades on 1/2" centers

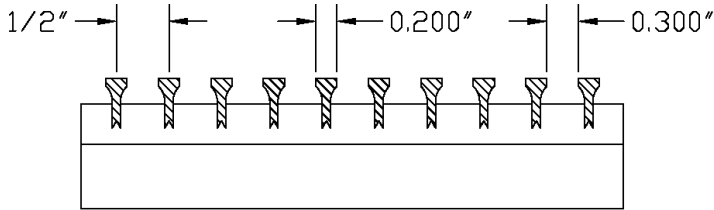


**-01**

0° 1/4" blades on 1/2" centers

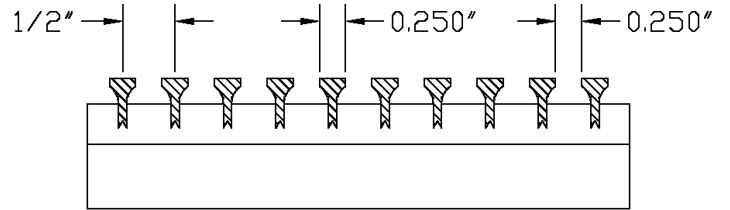


**-15**

15° 13/64" blades on 1/2" centers

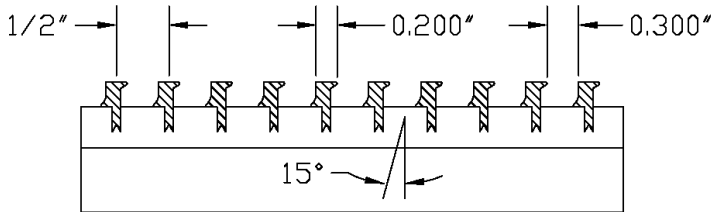


**-30**

30° 13/64" blades on 1/2" centers

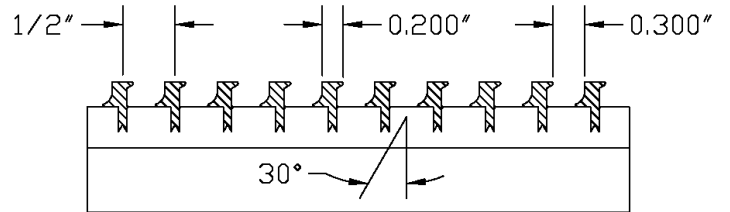


**-82**

0° 1/8" blades on 1/2" centers

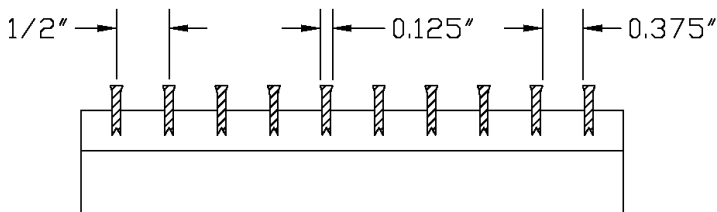

**-84**

0° 1/8" blades on 1/4" centers


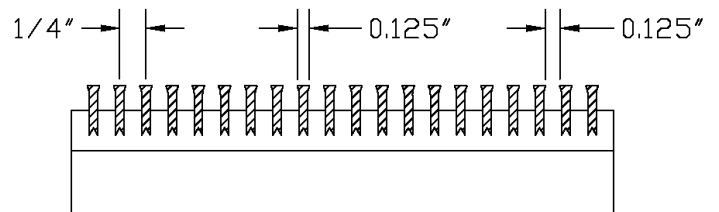


## MOUNTING

Both a top & bottom mounting option is required for securing the grille to the outer frame.

Wire Hinge



**B**

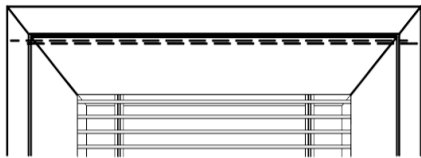

**B - Wire Hinge** mounting is for hinged access only, and grille face is connected to the outer filter frame.

Nylon Thumb Screw



**C**

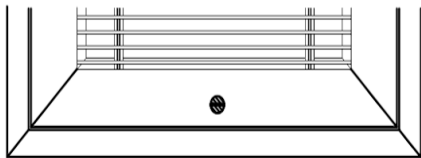

**C - Nylon Thumb Screw**

Nylon Screen Tabs



**D**

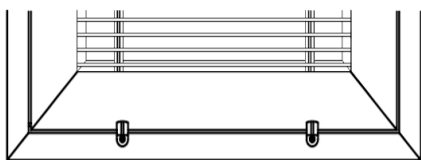

**D - Nylon Screen Tab**

Security Screw

**E**

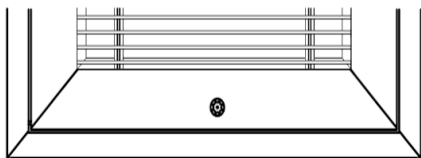

**E - Security Key** bit is required for access. The security key is available separately for order as a FG-KEY.