




Width Dimensions by Slot

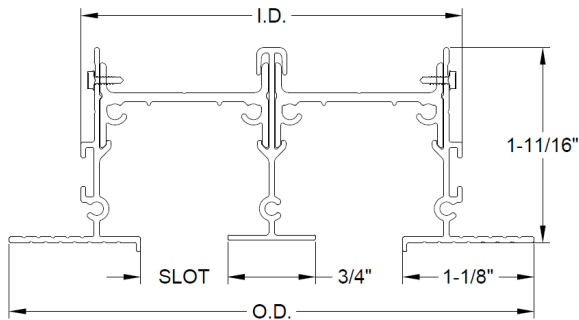


I.D. = Inside Dimension

O.D. = Outside Dimension

	1/2" SLOT		3/4" SLOT		1" SLOT	
# OF SLOTS	I.D.	O.D.	I.D.	O.D.	I.D.	O.D.
1	1-5/8"	2-3/4"	1-7/8"	3"	2-1/8"	3-1/4"
2	2-7/8"	4"	3-3/8"	4-1/2"	3-7/8"	5"
3	4-1/8"	5-1/4"	4-7/8"	6"	5-5/8"	6-3/4"
4	5-3/8"	6-1/2"	6-3/8"	7-1/2"	7-3/8"	8-1/2"

Length Dimensions for End Configurations

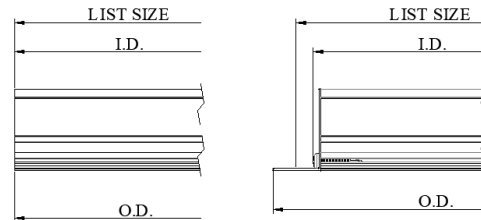

I.D. = Inside Dimension

O.D. = Outside Dimension

	E2 - Both Ends	E1 - One End	EQ - Open Ends
I.D.	List - 1/2"	List - 1/4"	List Size
O.D.	List + 1-1/2"	List + 3/4"	List Size

- Mud-in, recessed flange frame to be taped & plastered over.
- Fully extruded, high quality aluminum construction.
- Available in any length. Lengths over 84" are joined together with provided alignment pins for continuous appearance.
- Available with durable powder coat finish.

1. Specify Quantity

2. Specify the Length Dimensions

Available on 1/2" increments as standard. Custom sizes down to 1/16" increments.

_____ ☐ inches ☐ mm

Invisible lip design allows for a true frameless appearance, and easier installation.

3. Select a Slot Width

- ☐ 50 - 1/2" slot
☐ 75 - 3/4" slot
☐ 10 - 1" slot

4. Select a Number of Slots

- ☐ 1 - 1 Slot ☐ 4 - 4 Slots
☐ 2 - 2 Slots
☐ 3 - 3 Slots

5. Select a Mounting Option

- ☐ A - Screw Holes
☐ C - Concealed Bracket
☐ TB - No Mounting
☐ D - Concealed Screw Holes

6. Select an End Configuration

- ☐ E2 - Both Ends
☐ E1 - One End
☐ EQ - None

7. Select a Finish

- ☐ W - White

8. Select a Lead Time

- ☐ 3 Day Ship
☐ Next Friday
☐ Standard Delivery

3 DAY SHIP
 ANY SIZE. ANY MODEL.
 GUARANTEED

Mitred Corner

See Slot Linear options page for more details.

- ☐ MC 90 - 90° ☐ MC 135 - 135°

Project / Location:

Architect:

Engineer:

Contractor:




Scan for more product information.

MOUNTING Shown with end cap construction.


-A

Screw Holes



-C


Concealed Bracket



-D


Concealed Screw Holes

(-E2 only. List sizes under 84" only.)





-TB

Lay In / No Mounting



CORNER PIECE



Corner pieces available at 90° (**MC 90**) and 135° (**MC 135**) as standard.

Corner pieces are provided with alignment pins for a precision match to straight sections.

O.D. and I.D., as shown in the diagram, are the same for 1-4 slots and all slot widths.


FIELD CUTTING

For end cap construction only. DASL can be cut to size in the field. Use a fine-tooth, high-speed, carbon blade for cutting aluminum.

A maximum of 3" can be cut from each end (X).

For adjustments of more than 2" slide the retaining clip against support. Diffusers can be adjusted up to 6" by cutting both ends.

If end caps are included, remove before cutting and reattach once cut.



Scan for more
product
information.