


Width Dimensions by Slot

End Cap Construction

Mitre Corner Construction

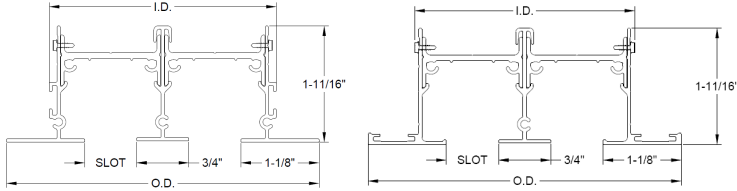

- Fully extruded, high quality aluminum construction.
- Pair with DASL for active sections to match.
- Available in any length. Lengths over 84" are joined together with provided alignment pins for continuous appearance.
- Available with durable powder coat finish.

1. Specify Quantity

2. Specify the Length Dimensions

Available on 1/2" increments as standard. Custom sizes down to 1/16" increments.

_____ ☐ inches ☐ mm

3. Select a Slot Width

- ☐ 50 - 1/2" slot
- ☐ 75 - 3/4" slot
- ☐ 10 - 1" slot

4. Select a Number of Slots

- ☐ 1 - 1 Slot ☐ 4 - 4 Slot
- ☐ 2 - 2 Slots ☐ 5-13 Slots
- ☐ 3 - 3 Slots _____ (Mitre Corner only)

5. Select a Mounting Option

- ☐ A - Screw Holes
- ☐ C - Concealed Bracket
- ☐ TB - No Mounting
- ☐ D - Sidewall Screws
- For -E2 and -M2 only. List size under 84" only.

6. Select an End Configuration

- ☐ E2 - Both End Caps
- ☐ E1 - One End Cap
- ☐ M2 - Both Mitre Corners
- ☐ M1 - One Mitre Corner
- ☐ E0 - Open Ends

7. Select a Lead Time

3 Day Ship available on white finish only.

- ☐ 3 Day Ship
- ☐ Next Friday
- ☐ Standard Delivery

8. Select a Finish

- ☐ W - White
- ☐ FB - Flat Black

3 DAY SHIP
ANY SIZE. ANY MODEL.
GUARANTEED

Corner Piece

See page 2 for details.

- ☐ MC 90 - 90°
- ☐ MC 135 - 135°



Additional Options

See submittal pages for details.

- ☐ DASL - Supply
- ☐ J - Concealed Mud-In

Project / Location:

Architect:

Engineer:


Contractor:

Slots 5-13 for Mitre Corner End Only

Slot Number	1/2" SLOT		3/4" SLOT		1" SLOT	
	I.D.	O.D.	I.D.	O.D.	I.D.	O.D.
1	1-5/8"	2-3/4"	1-7/8"	3"	2-1/8"	3-1/4"
2	2-7/8"	4"	3-3/8"	4-1/2"	3-7/8"	5"
3	4-1/8"	5-1/4"	4-7/8"	6"	5-5/8"	6-3/4"
4	5-3/8"	6-1/2"	6-3/8"	7-1/2"	7-3/8"	8-1/2"
5	6-5/8"	7-3/4"	7-7/8"	9"	9-1/8"	10-1/4"
6	7-7/8"	9"	9-3/8"	10-1/2"	10-7/8"	12"
7	9-1/8"	10-1/4"	10-7/8"	12"	12-5/8"	13-3/4"
8	10-3/8"	11-1/2"	12-3/8"	13-1/2"	14-3/8"	15-1/2"
9	11-5/8"	12-3/4"	13-7/8"	15"	16-1/8"	17-1/4"
10	12-7/8"	14"	15-3/8"	16-1/2"	17-7/8"	19"
11	14-1/8"	15-1/4"	16-7/8"	18"	19-5/8"	20-3/4"
12	15-3/8"	16-1/2"	18-3/8"	19-1/2"	21-3/8"	22-1/2"
13	16-5/8"	17-3/4"	19-7/8"	21"	23-1/8"	24-1/4"


End Configurations

End Cap




I.D. = Inside Dimension

Mitre Corner



O.D. = Outside Dimension

Open End



Length Dimensions by End Configurations

End Caps	
E2 - Both Ends	E1 - One End
I.D. List - 1/2"	List - 1/4"
O.D. List + 1-1/2"	List + 3/4"

Mitre Corners	
M2 - Both Ends	M1 - One End
I.D. List - 3/16"	List - 3/32"
O.D. List + 1"	List + 1/2"

Open Ends
E0 - Open Ends
I.D. List Size
O.D. List Size




Scan for more product information.

MOUNTING Shown with end cap construction.


-A

Screw Holes




-C

Concealed Bracket




-D

Concealed Screw Holes
(-E2 and -M2 only. List sizes under 84" only.)





-TB

Lay In / No Mounting



CORNER PIECE



Corner pieces available at 90° (**MC 90**) and 135° (**MC 135**) as standard.

Corner pieces are provided with alignment pins for a precision match to straight sections.

O.D. and I.D., as shown in the diagram, are the same for 1-4 slots and all slot widths.

FIELD CUTTING


For end cap construction only. DASLR can be cut to size in the field. Use a fine-tooth, high-speed, carbon blade for cutting aluminum.

A maximum of 3" can be cut from each end (X).

For adjustments of more than 2" slide the retaining clip against support.

Diffusers can be adjusted up to 6" by cutting both ends.

If end caps are included, remove before cutting and reattach once cut.



Scan for more
product
information.