




- Reinforced heavy duty core with supports every 2".
- Core is fully removable, and held in place with pressure clips.
- Fully extruded, high quality aluminum construction for a stylish appearance.
- Fixed blades parallel to the long dimension.
- Designed for floor or reinforced sidewall, sill and ceiling installation.
- Available with durable powder coat finish.

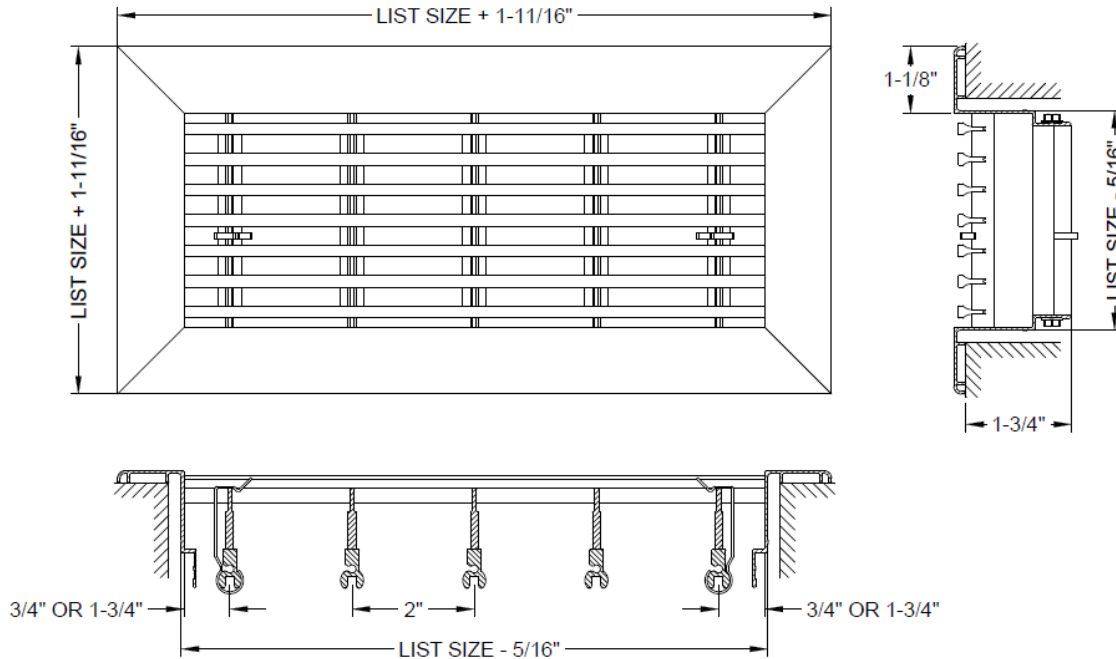

1. Specify Quantity

2. Specify the Length x Height Dimensions

Available on 1/2" increments as standard. Custom sizes down to 1/16" increments.

_____ x _____ ☐ inches ☐ mm

Available for floor use in continuous lengths and up to 16" heights.

3. Select a Blade Option

- ☐ 00 - 0° Deflection
- ☐ 01 - 0° Pencil Proof
- ☐ 15 - 15° Deflection
- ☐ 30 - 30° Deflection
- ☐ 82 - 0° Air Flow
- ☐ 84 - 0° Heel Proof

4. Select a Mounting Option

- ☐ A - Screw Holes
- ☐ B - Spring Clips
- ☐ C - Concealed Brackets
- ☐ TB - No Mounting

5. Select a Finish

- ☐ W - White
- ☐ S - Silver
- ☐ B - Brown
- ☐ M - Mill
- ☐ FB - Flat Black
- ☐ Special: _____

6. Select a Lead Time

- ☐ 3 Day Ship
- ☐ Next Friday
- ☐ Standard Delivery

3 DAY SHIP
ANY SIZE. ANY MODEL.
GUARANTEED

Additional Options

See specific submittal pages for options listed below.

- ☐ D - Opposed Blade Damper
- ☐ N - No Flange

Project / Location: _____

Architect: _____

Engineer: _____

Contractor: _____




Scan for more product information.

BLADE OPTIONS


-00

0° 13/64" blades on 1/2" centers

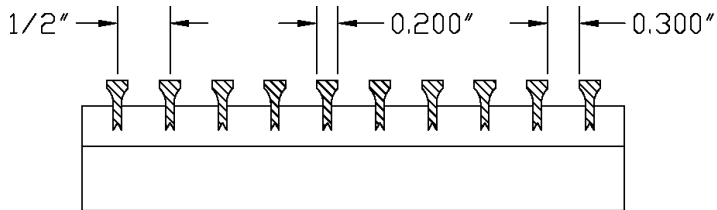


-01

0° 1/4" blades on 1/2" centers

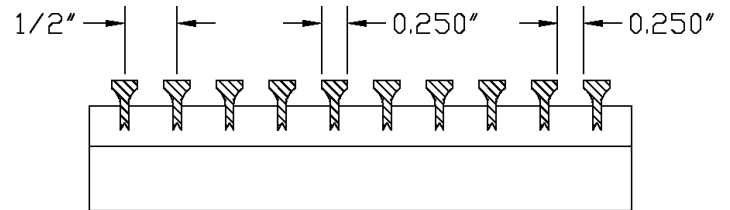


-15

15° 13/64" blades on 1/2" centers

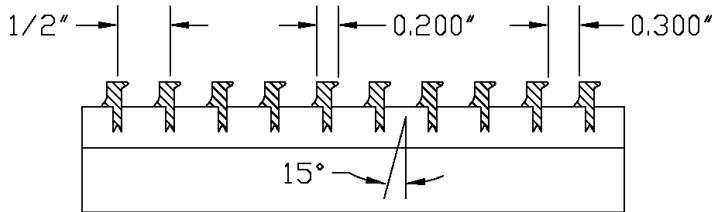


-30

30° 13/64" blades on 1/2" centers

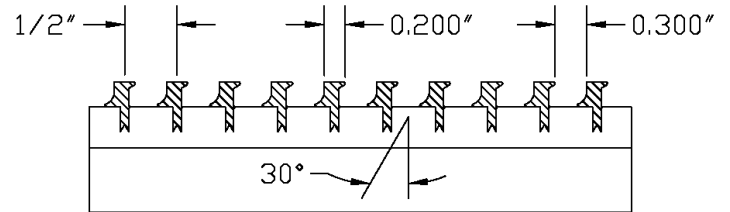


-82

0° 1/8" blades on 1/2" centers

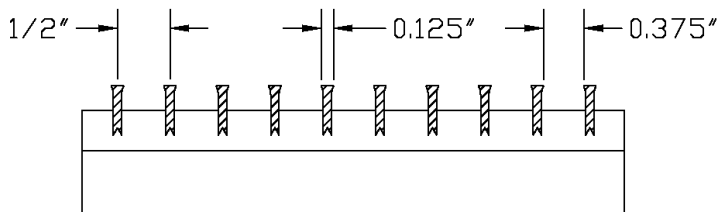

-84

0° 1/8" blades on 1/4" centers

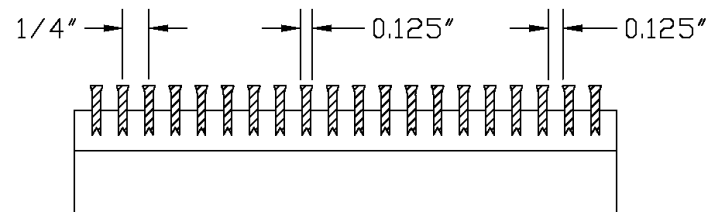


Scan for more
product
information.

MOUNTING

-A


Screw Holes

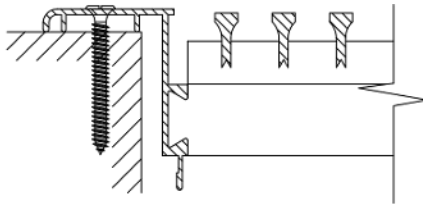

Color matched screws with countersunk screw holes.

-B


Spring Clips

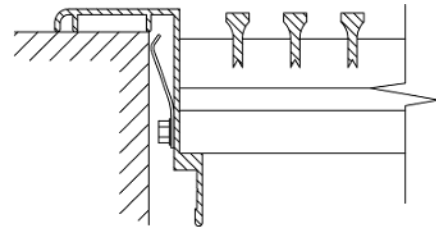

Hidden clips behind the flange to keep the grille secure in the opening.
Only suitable for floor & sill applications.

-C


Concealed Brackets

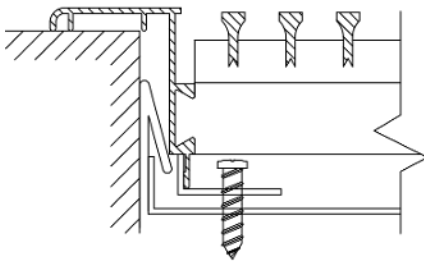

Product is fastened to duct-mounted brackets, which are concealed behind the blades.

-D


Sidewall Screw Holes

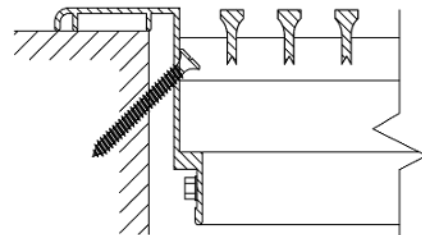

Screw holes are drilled at a 45° angle on inner flange.
Only available with Removable Core.

-TB

No Mounting

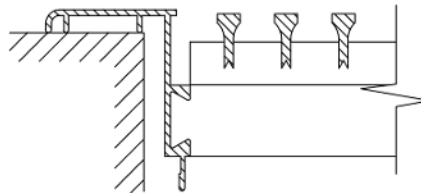

Designed for lay-in ceiling and custom applications.
For lay-in, order 2" under to account for flange.

e.g. 22" x 10" will have O.D. 23-11/16" x 11-11/16"
and fit a standard 24" x 12" T-bar opening.



Scan for more
product
information.