SUBMITTAL

DABLRJ | Bar Linear Grille w/ Mud-In Flange & Removable Core

- Mud-in, recessed flange frame to be taped & plastered over.
- Fully extruded, high quality aluminum construction for a stylish appearance.
- Core is fully removable, and held in place with pressure clips.
- Fixed blades parallel to the long dimension.
- Sections over 84" are joined for continuous lengths with aligning pins provided.
- Available with durable powder coat finish.

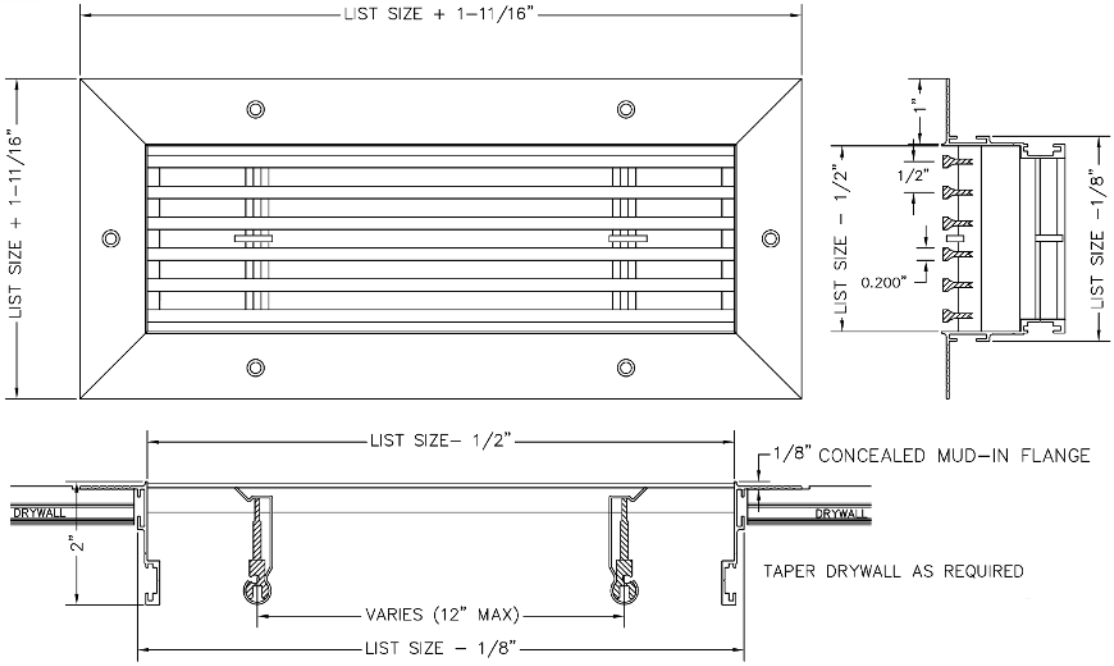

1. Specify Quantity

_____

2. Specify the Length x Height Dimensions

Available on 1/2" increments as standard. Custom sizes down to 1/16" increments.

_____ x _____ ☐ inches ☐ mm

Invisible lip design allows for a true frame-less appearance, and easier installation.

3 DAY SHIP
ANY SIZE. ANY MODEL.
GUARANTEED

3. Select a Blade Option

- ☐ 00 - 0° Deflection
- ☐ 01 - 0° Pencil Proof
- ☐ 15 - 15° Deflection
- ☐ 30 - 30° Deflection
- ☐ 82 - 0° Air Flow
- ☐ 84 - 0° Heel Proof

4. Select a Mounting Option

- ☐ A - Screw Holes
- ☐ D - Sidewall Screw Holes
- ☐ TB - No Mounting

Additional Options

- ☐ D - Opposed Blade Damper
- ☐ TB - No Screw Holes
- ☐ AA - All Aluminum

5. Select a Finish

- ☐ W - White
- ☐ S - Silver
- ☐ B - Brown
- ☐ M - Mill
- ☐ FB - Flat Black
- ☐ Special: _____

6. Select a Lead Time

- ☐ 3 Day Ship
- ☐ Next Friday
- ☐ Standard Delivery

Project / Location: _____

Architect: _____

Engineer: _____

Contractor: _____

Scan for more product information.

mail@dayus.com ■ www.dayus.com ■ (519) 737-1199

BLADE OPTIONS

-00
0° 13/64" blades on 1/2" centers

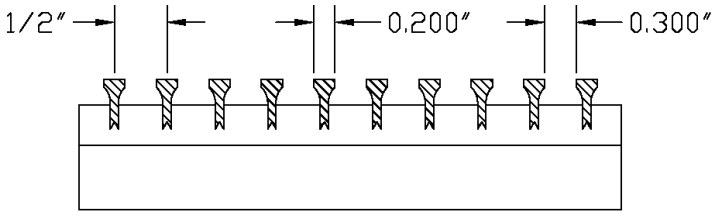

-01
0° 1/4" blades on 1/2" centers

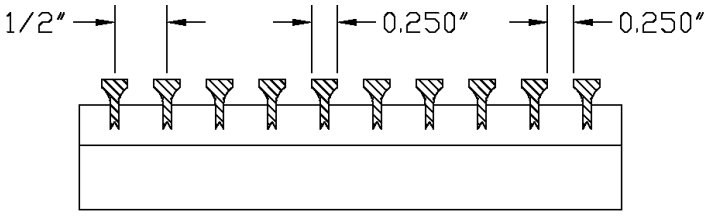

-15
15° 13/64" blades on 1/2" centers

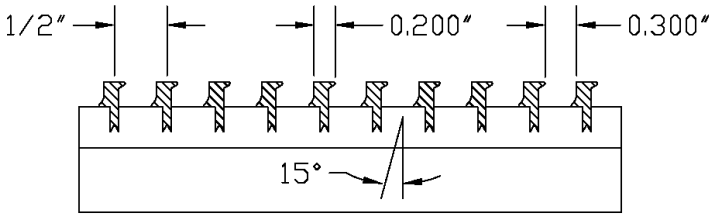

-30
30° 13/64" blades on 1/2" centers

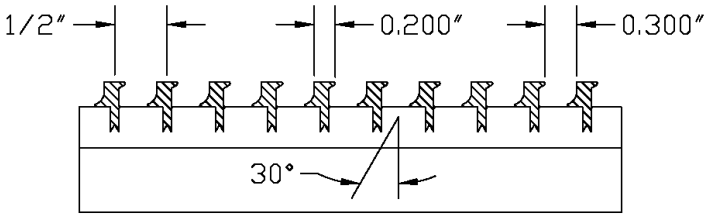

-82
0° 1/8" blades on 1/2" centers

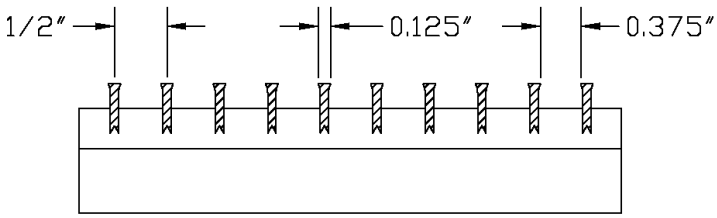

-84
0° 1/8" blades on 1/4" centers

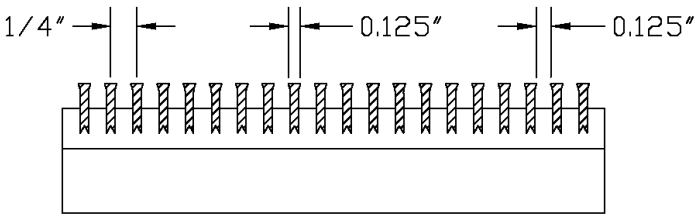

MOUNTING

-A
Screw Holes

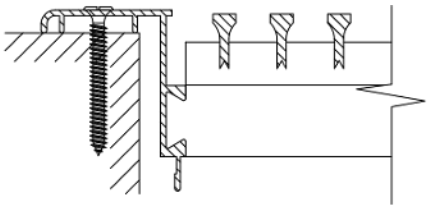

Color matched screws with
countersunk screw holes.

-B
Spring Clips

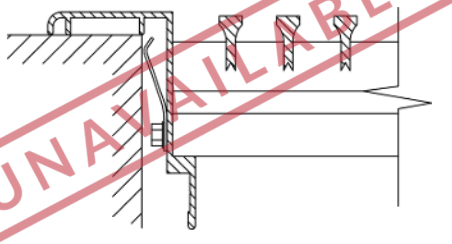

Hidden clips behind the flange to keep
the grille secure in the opening.
Only suitable for floor & sill applications.

-C
Concealed Brackets

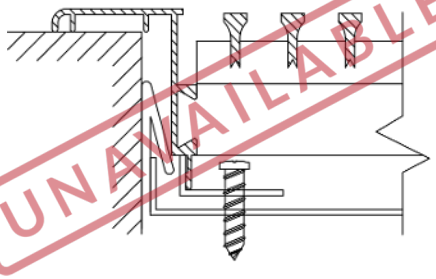

Product is fastened to duct-mounted brackets,
which are concealed behind the blades.

-D
Sidewall Screw Holes

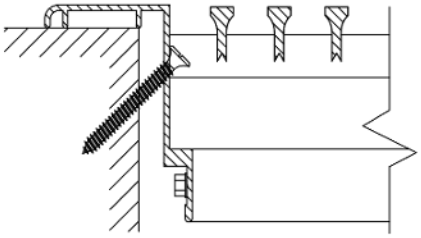

Screw holes are drilled at a
45°angle on inner flange.
Only available with Removable Core.

-TB
No Mounting

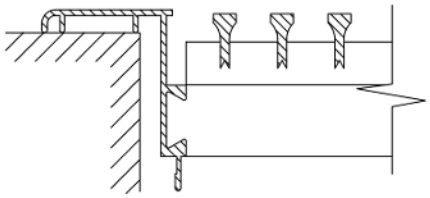

Designed for lay-in ceiling and custom applications.
For lay-in, order 2" under to account for flange.

e.g. 22" x 10" will have O.D. 23-11/16" x 11-11/16"
and fit a standard 24" x 12" T-bar opening.