

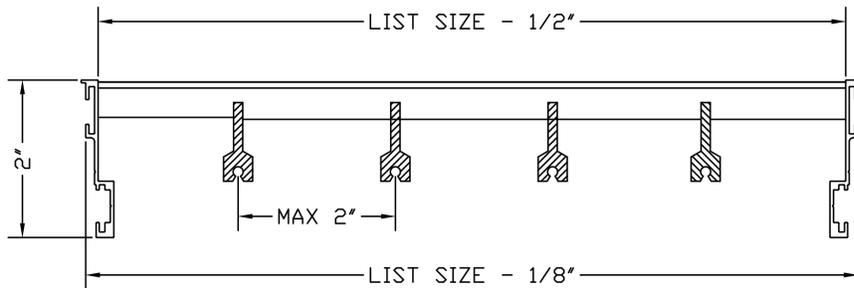




- Reinforced heavy duty core with supports every 2".
- No flange frame designed for a clean, built-in appearance.
- Fully extruded, high quality aluminum construction for a stylish appearance.
- Fixed blades parallel to the long dimension.
- Available with durable powder coat finish.

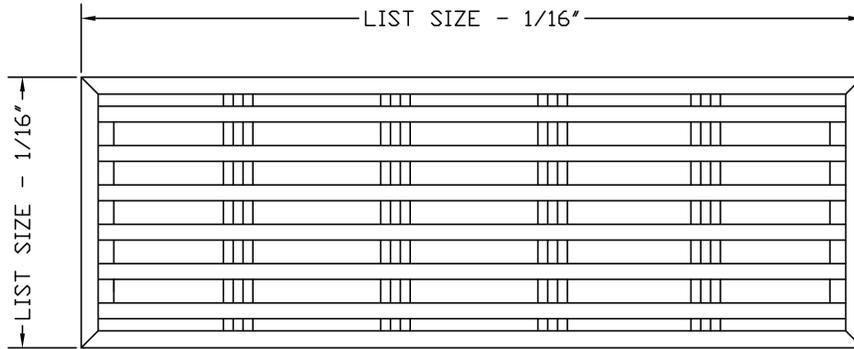

1. Specify Quantity

2. Specify the Length x Height Dimensions

Available on 2" increments as standard. Custom sizes down to 1/16" increments.

_____ x _____ inches mm

Available for floor use in continuous lengths and up to 16" heights.

3. Select a Blade Option

- 00 - 0° Deflection
- 01 - 0° Pencil Proof
- 15 - 15° Deflection
- 30 - 30° Deflection
- 82 - 0° Air Flow
- 84 - 0° Heel Proof

4. Select a Mounting Option

- C - Concealed Brackets
(Not for Floor Use)
- TB - No Mounting

5. Select a Finish

- W - White
- S - Silver
- B - Brown
- M - Mill
- FB - Flat Black
- Special: _____

6. Select a Lead Time

- 3 Day Ship
- Next Friday
- Standard Delivery



Additional Options

See specific submittal pages for options listed below.

- D - Opposed Blade Damper

Project / Location:

Architect:

Engineer:

Contractor:




Scan for more product information.

BLADE OPTIONS


-00

0° 13/64" blades on 1/2" centers

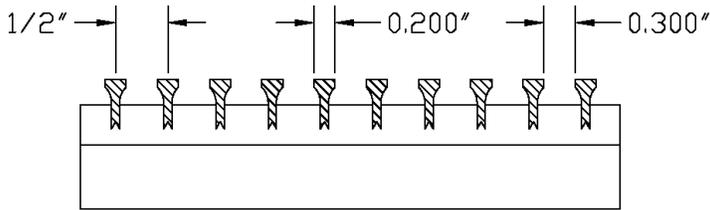


-01

0° 1/4" blades on 1/2" centers

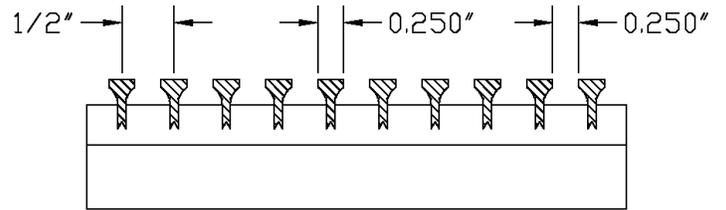


-15

15° 13/64" blades on 1/2" centers

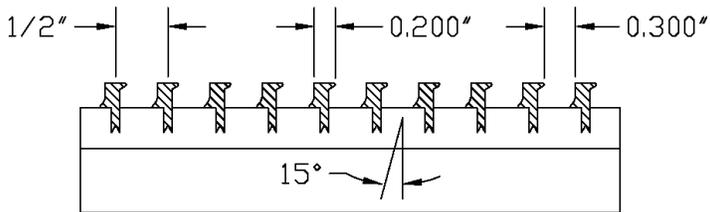


-30

30° 13/64" blades on 1/2" centers

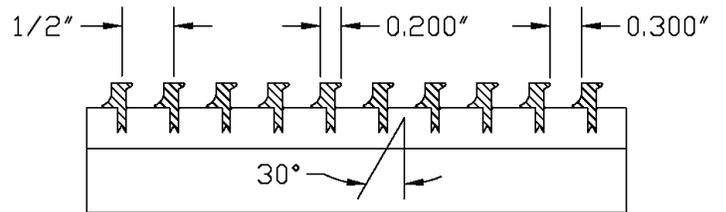


-82

0° 1/8" blades on 1/2" centers

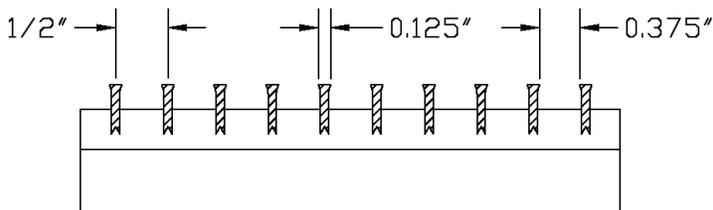

-84

0° 1/8" blades on 1/4" centers

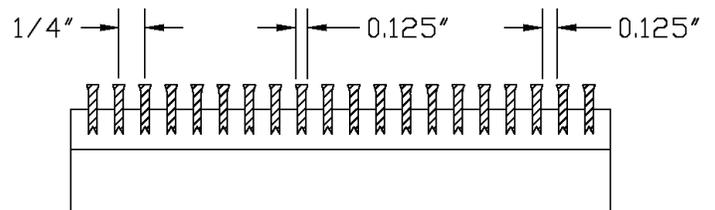


Scan for more
product
information.

MOUNTING

-A


Screw Holes

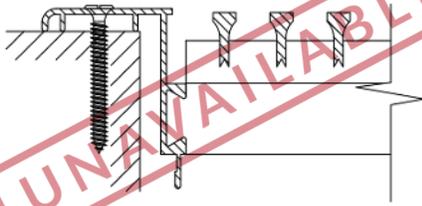

Color matched screws with countersunk screw holes.


-B

Spring Clips

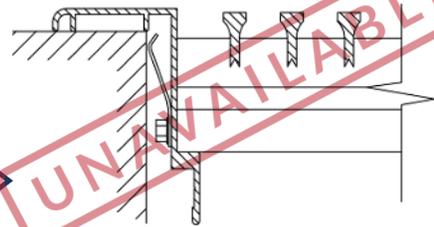


Hidden clips behind the flange to keep the grille secure in the opening. Only suitable for floor & sill applications.

These mounting options are only available with flanged grilles.



-C


Concealed Brackets

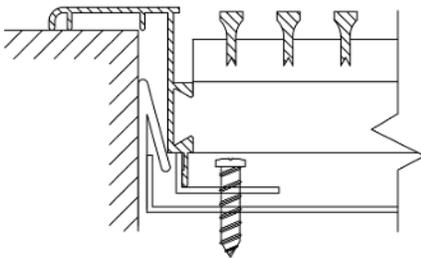

Product is fastened to duct-mounted brackets, which are concealed behind the blades.

-D


Sidewall Screw Holes

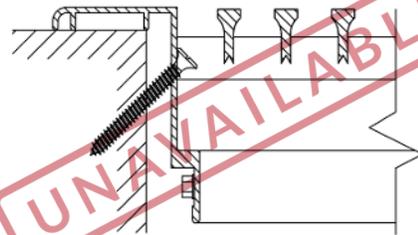

Screw holes are drilled at a 45° angle on inner flange. Only available with Removable Core.

-TB

No Mounting

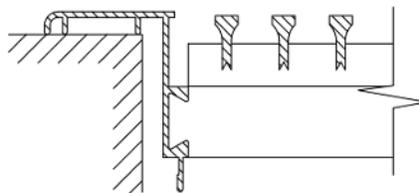

Designed for lay-in ceiling and custom applications. For lay-in, order 2" under to account for flange.

e.g. 22" x 10" will have O.D. 23-11/16" x 11-11/16" and fit a standard 24" x 12" T-bar opening.



Scan for more product information.