



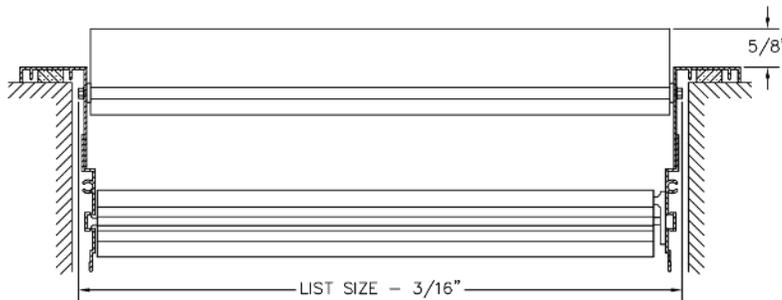

- Individually adjustable horizontal blades with 1-1/2" spacing.
- Fully extruded, high quality aluminum blades with semi-airfoil design.
- Opposed blade damper with slide operator.
- High quality aluminum extruded frame.
- Sealing gasket used to prevent streaking on walls or ceiling.
- Countersunk #6 screw hole mounting c/w painted screws.
- Mullions used for sizes over 26" in length.
- Available with durable powder coat finish.

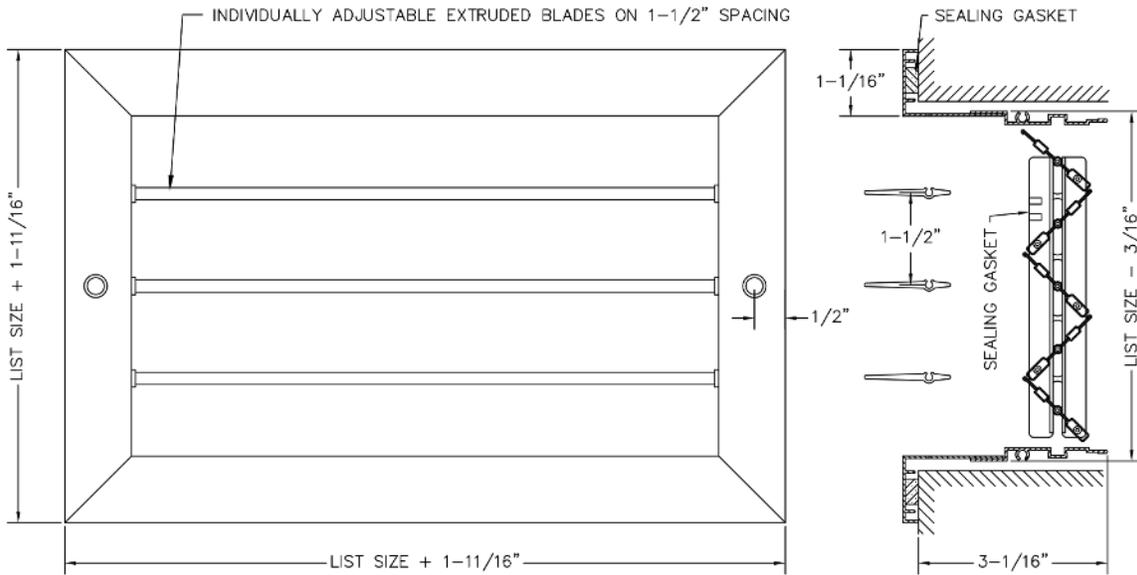

**3 DAY SHIP**  
ANY SIZE. ANY MODEL.  
**GUARANTEED**

**1. Specify Quantity**

\_\_\_\_\_

**2. Specify the Length x Height Dimensions**

Available on 2" increments as standard. Custom sizes down to 1/16" increments.

\_\_\_\_\_ x \_\_\_\_\_  inches  mm

**Additional Options**

- TB - No Screw Holes
- R - Recessed Blades
- R-G - Recessed Blades & Gang Operator

**3. Select a Finish**

- W - White
- S - Silver
- M - Mill

**4. Select a Lead Time**

- 3 Day Ship
- Next Friday
- Standard Delivery

**Project / Location:**

**Architect:**

**Engineer:**

**Contractor:**




Scan for more product information.

## OPTIONS

### Standard

No additional option

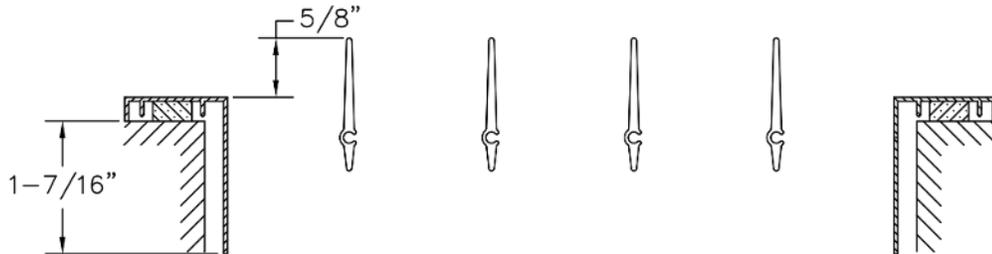


### -R

Recessed Blades



### -R-G

Recessed Blades  
with Gang Operator

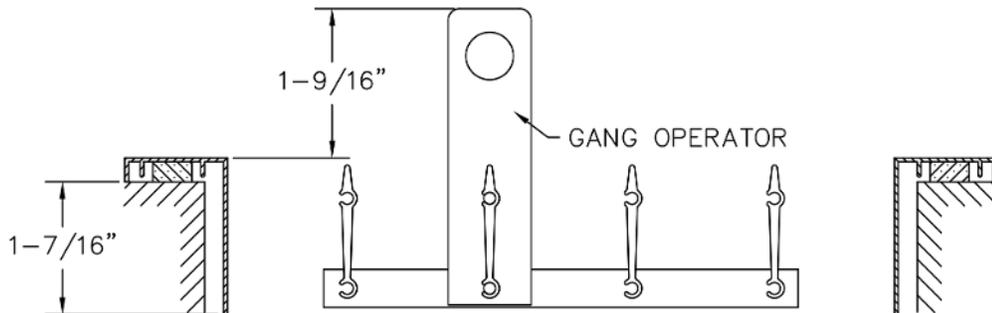

Gang operator can extend up to 1-9/16".  
An extra operator required to be installed every 26" in length.  
Only available with -R Recessed Blade option specified.



Scan for more  
product  
information.