




- Individually adjustable horizontal and vertical blades with 1-1/2" spacing.
- Fully extruded, high quality aluminum blades with semi-airfoil design.
- Opposed blade damper with slide operator.
- High quality aluminum extruded frame.
- Sealing gasket used to prevent streaking on walls or ceiling.
- Countersunk #6 screw hole mounting c/w painted screws.
- Mullions used for dimensions over 26" in size.
- Available with durable powder coat finish.

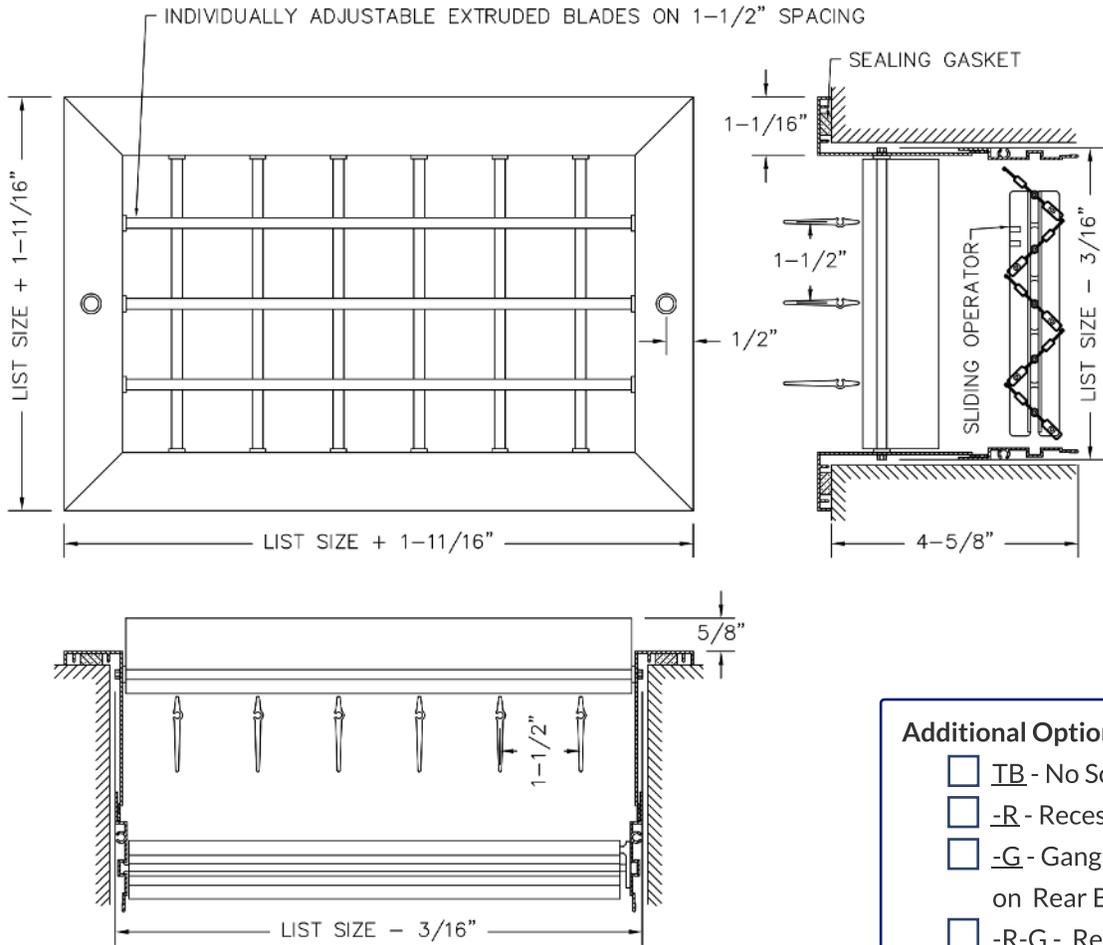

3 DAY SHIP
ANY SIZE. ANY MODEL.
GUARANTEED

- Additional Options**
- TB - No Screw Holes
 - R - Recessed Blades
 - G - Gang Operator on Rear Blades
 - R-G - Recessed Blades & Gang Operator
- ON _____ (Front/Back/Both)

1. Specify Quantity

2. Specify the Length x Height Dimensions

Available on 2" increments as standard. Custom sizes down to 1/16" increments.

_____ x _____ inches mm

3. Select a Finish

- W - White
- S - Silver
- M - Mill

4. Select a Lead Time

- 3 Day Ship
- Next Friday
- Standard Delivery

Project / Location:

Architect:

Engineer:

Contractor:




Scan for more product information.

OPTIONS


Standard

No additional option

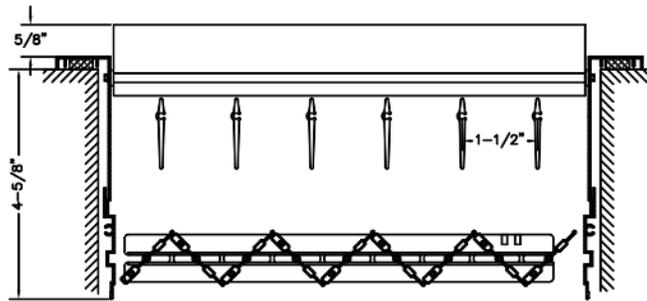


-R

Recessed Blades

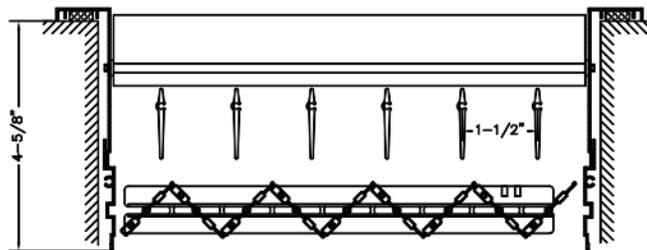

-G

Gang Operator

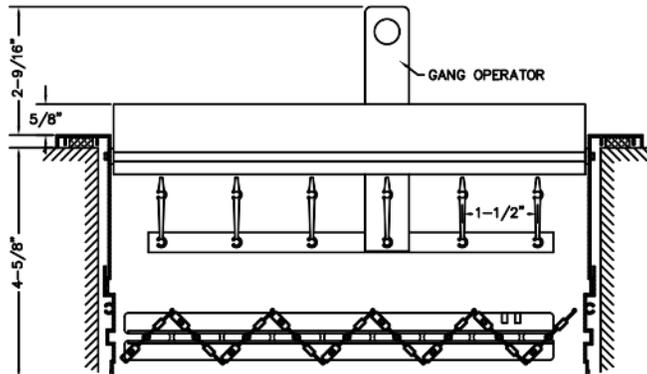


Gang operator can extend up to 2-9/16".

An extra gang operator required every 26" on dimension operator installed on.

-R-G

Recessed Blades
with Gang Operator

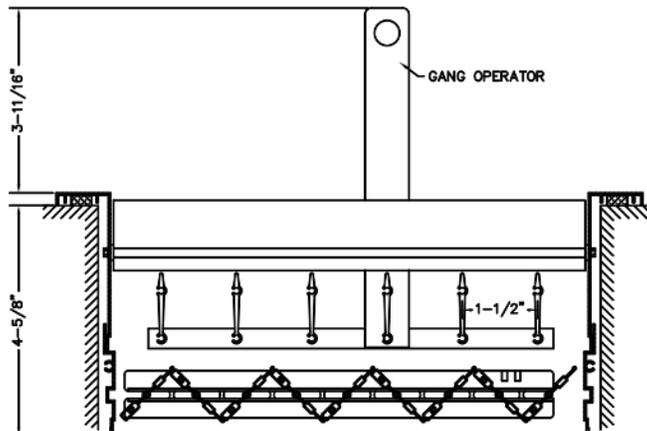

Gang operator can extend up to 3-11/16".

An extra gang operator required every 26" on dimension operator installed on.



Scan for more
product
information.