




- Individually adjustable vertical blades with 1-1/2" spacing.
- Fully extruded, high quality aluminum blades with semi-airfoil design.
- Opposed blade damper with slide operator.
- High quality aluminum extruded frame.
- Sealing gasket used to prevent streaking on walls or ceiling.
- Countersunk #6 screw hole mounting c/w painted screws.
- Mullions used for sizes over 26" in height.
- Available with durable powder coat finish.

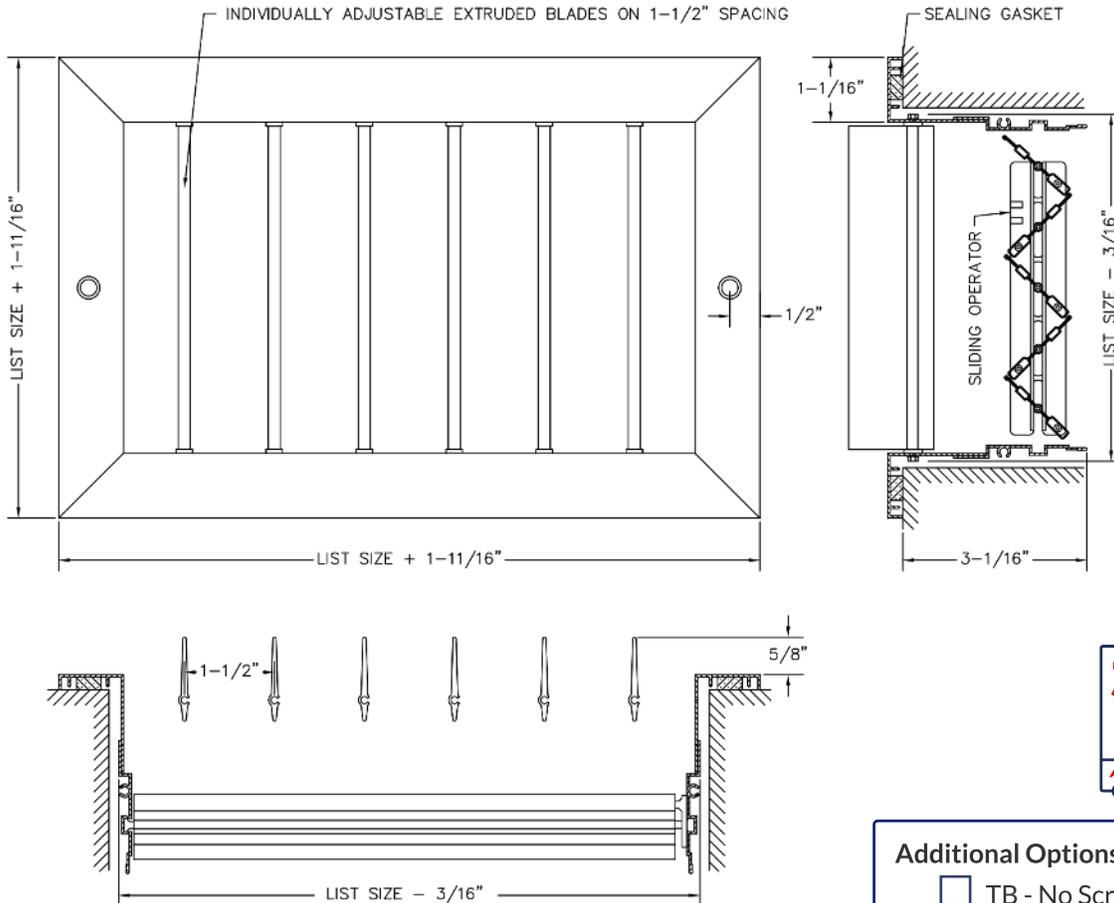

3 DAY SHIP
ANY SIZE. ANY MODEL.
GUARANTEED

1. Specify Quantity

2. Specify the Length x Height Dimensions

Available on 2" increments as standard. Custom sizes down to 1/16" increments.

_____ x _____ inches mm

3. Select a Finish

- W - White
- S - Silver
- M - Mill

4. Select a Lead Time

- 3 Day Ship
- Next Friday
- Standard Delivery

Additional Options

- TB - No Screw Holes
- R - Recessed Blades
- R-G - Recessed Blades & Gang Operator

Project / Location:

Architect:

Engineer:


Contractor:



Scan for more product information.

OPTIONS


Standard
No additional option

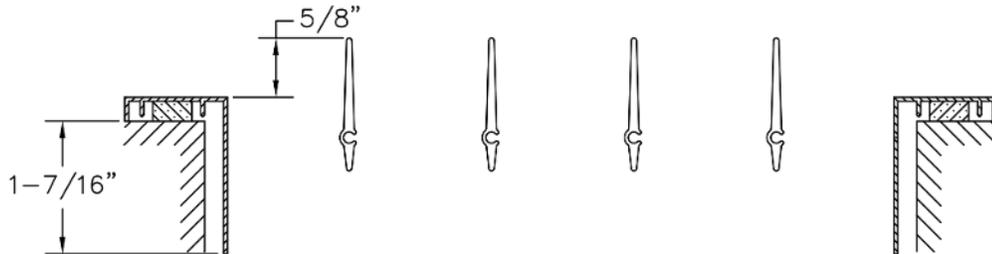

-R
Recessed Blades



-R-G
Recessed Blades
with Gang Operator

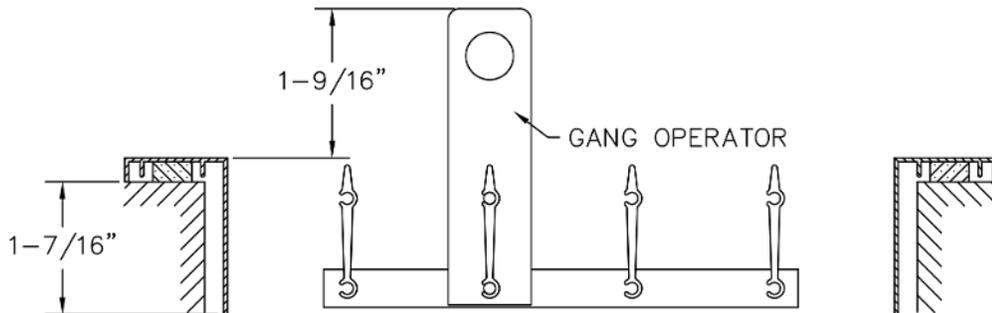

Gang operator can extend up to 1-9/16".
An extra operator required to be installed every 26" in length.
Only available with -R Recessed Blade option specified.



Scan for more
product
information.