


DABLRH | Bar Linear Grille w/ Drywall Flange & Removable Core



- Fully extruded, high quality aluminum construction for a stylish appearance.
- Core is fully removable, and held in place with pressure clips.
- Hidden flange designed to be installed underneath drywall.
- Fixed blades parallel to the long dimension.
- Sections over 84" are joined for continuous lengths with aligning pins provided.
- Available on 1/2" increments as standard. Custom sizes available down to 1/16" increments.
- Available with durable powder coat finish.

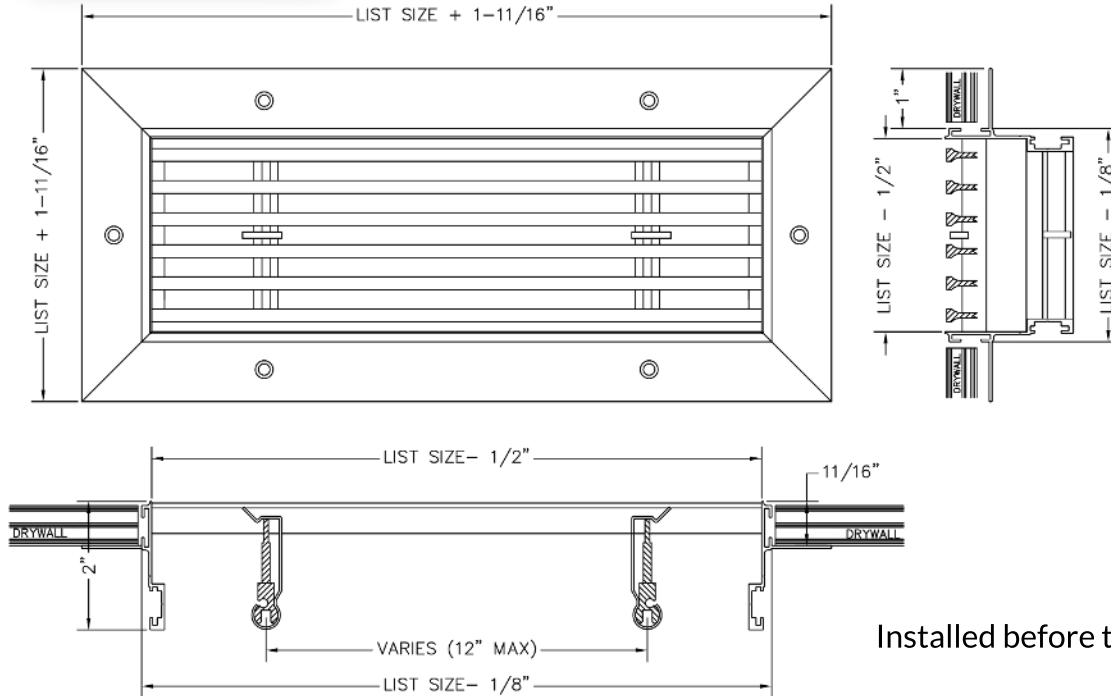

Installed before the drywall.

1. Select a Blade Option

- ☐ 00 - 0° Deflection
☐ 01 - 0° Pencil Proof
☐ 15 - 15° Deflection
☐ 30 - 30° Deflection
☐ 82 - 0° Air Flow
☐ 84 - 0° Heel Proof

2. Select a Mounting Option

- ☐ A - Screw Holes
☐ C - Concealed Brackets
☐ TB - No Mounting

3. Specify the Length x Height Dimensions

☐ Inches ☐ MM _____ x _____

4. Select a Finish

- ☐ W - White ☐ FB - Flat Black
☐ S - Silver ☐ Special: _____
☐ B - Brown
☐ M - Mill

5. Select a Lead Time

- ☐ 3 Day Ship
☐ Next Friday
☐ Standard Delivery

Invisible lip design allows for a true frameless appearance, and easier installation.

**3 DAY
SHIP**
ANY SIZE. ANY MODEL.
GUARANTEED

Additional Option

See specific submittal pages for options listed below.

- ☐ D - Opposed Blade Damper

Project / Location: _____

Architect: _____


Engineer: _____

Contractor: _____

BLADE OPTIONS


-00

0° 13/64" blades on 1/2" centers

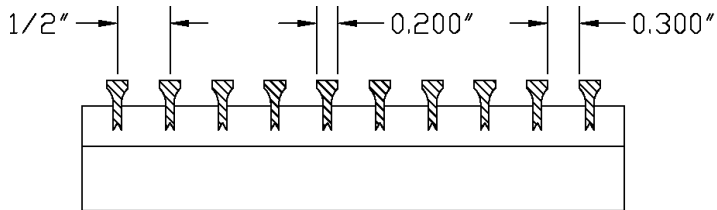


-01

0° 1/4" blades on 1/2" centers

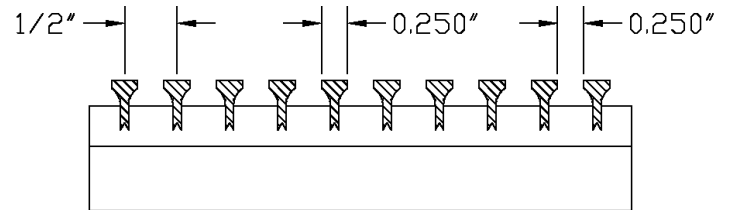


-15

15° 13/64" blades on 1/2" centers

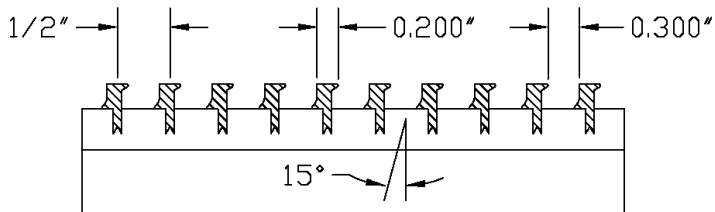


-30

30° 13/64" blades on 1/2" centers

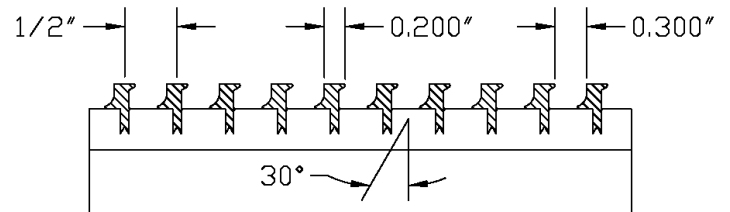


-82

0° 1/8" blades on 1/2" centers

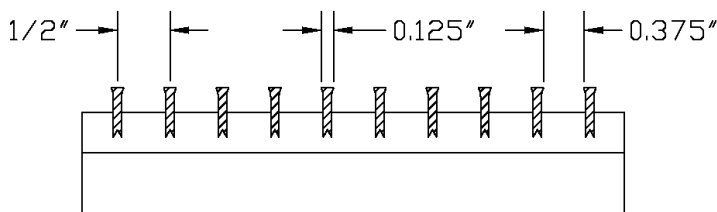

-84


0° 1/8" blades on 1/4" centers

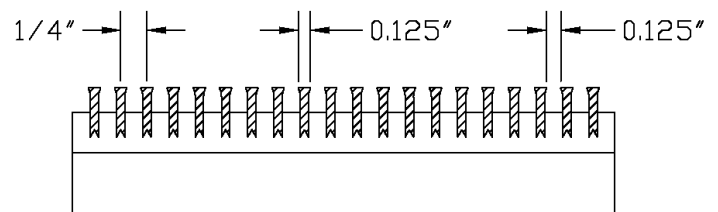

MOUNTING

-A


Screw Holes

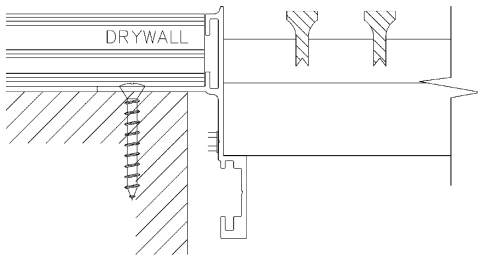

Color matched screws with countersunk screw holes.

-B


Spring Clips

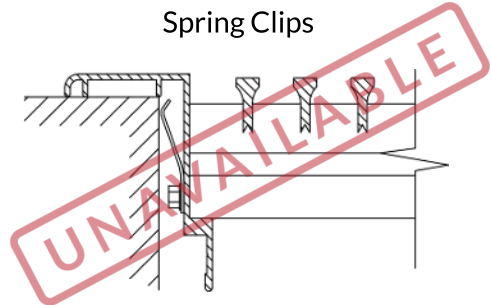

Hidden clips behind the flange to keep the grille secure in the opening.
Only suitable for floor & sill applications.

-C


Concealed Brackets

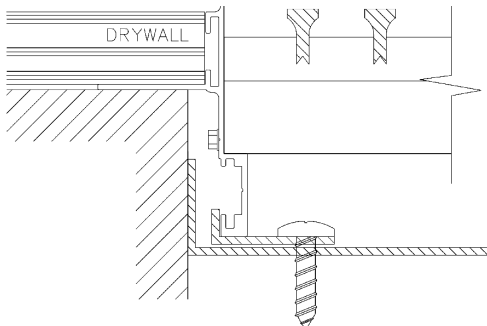

Product is fastened to duct-mounted brackets, which are concealed behind the blades.

-D


Sidewall Screw Holes

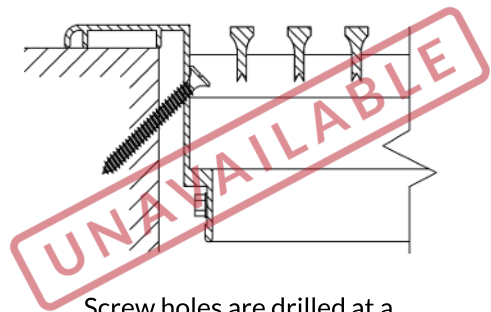

Screw holes are drilled at a 45° angle on inner flange.
Only available with Removable Core.

-TB

No Mounting

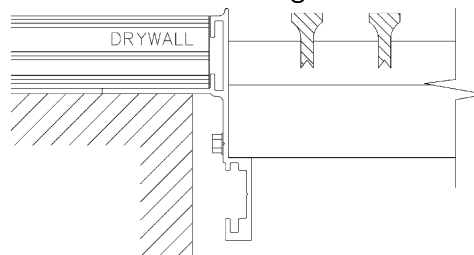

Designed for lay-in ceiling and custom applications.
For lay-in, order 2" under to account for flange.

e.g. 22" x 10" will have O.D. 23-11/16" x 11-11/16"
and fit a standard 24" x 12" T-bar opening.