




- Individually adjustable horizontal blades with 1-1/2" spacing.
- Fully extruded, high quality aluminum blades with semi-airfoil design.
- High quality aluminum extruded frame.
- Sealing gasket used to prevent streaking on walls or ceiling.
- Countersunk #6 screw hole mounting c/w painted screws.
- Mullions used for sizes over 26" in length.
- Available on 2" increments as standard. Custom sizes available down to 1/16" increments.
- Available with durable powder coat finish.

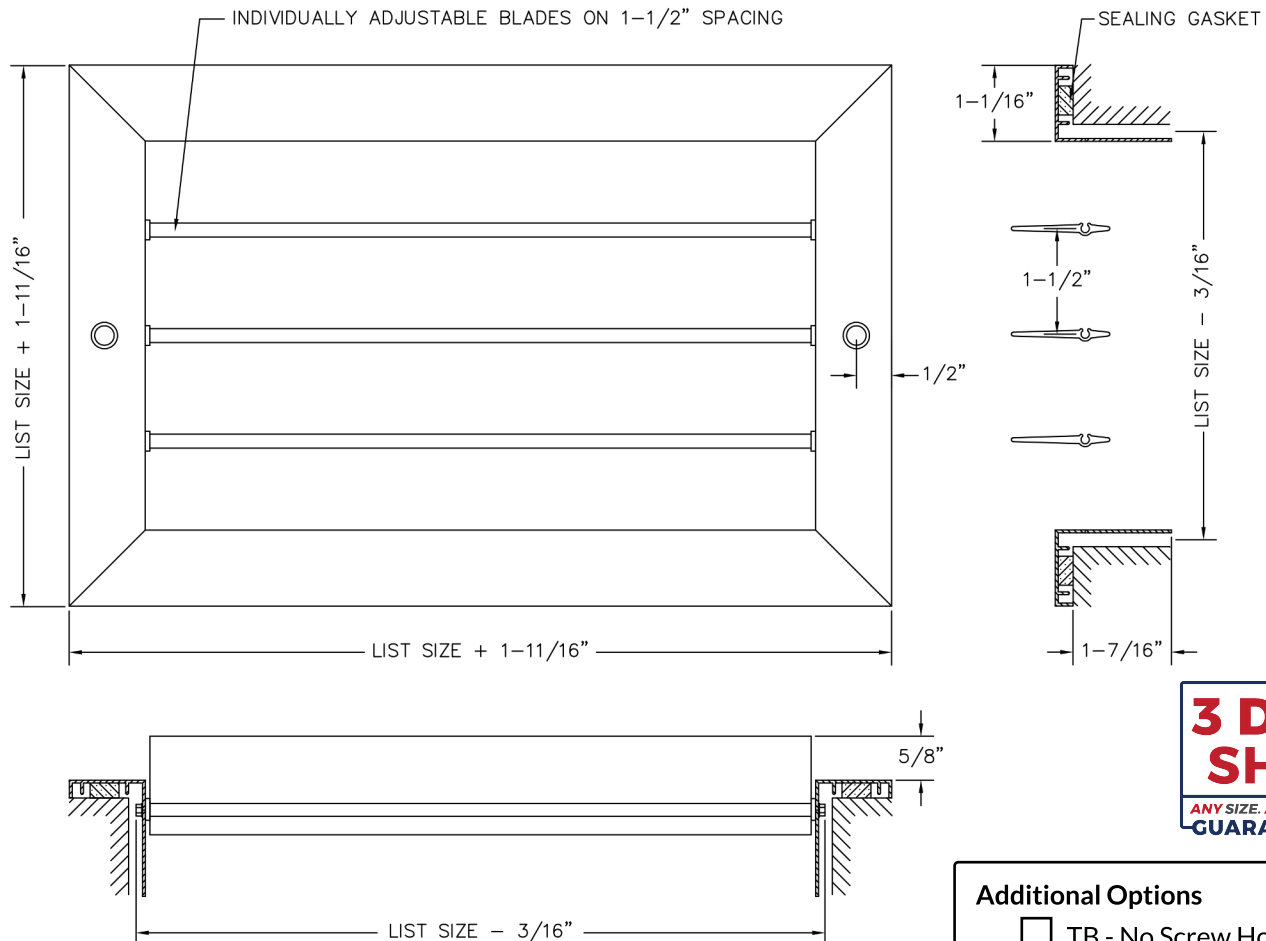

**3 DAY
SHIP**
ANY SIZE. ANY MODEL.
GUARANTEED

1. Specify the Length x Height Dimensions

Inches MM _____ x _____

2. Select a Finish

W White
S Silver
B Brown
M Mill

FB - Flat Black
Special: _____

3. Select a Lead Time

- ☐ 3 Day Ship
☐ Next Friday
☐ Standard Delivery


Additional Options

- ☐ TB - No Screw Holes
☐ -R - Recessed Blades
☐ -R-G - Recessed Blades
 & Gang Operator


Project / Location: _____
Architect: _____
Engineer: _____
Contractor: _____

OPTIONS


Standard
No additional option

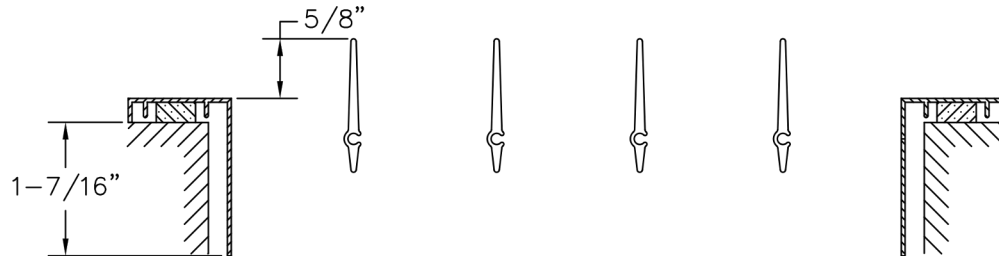

-R
Recessed Blades

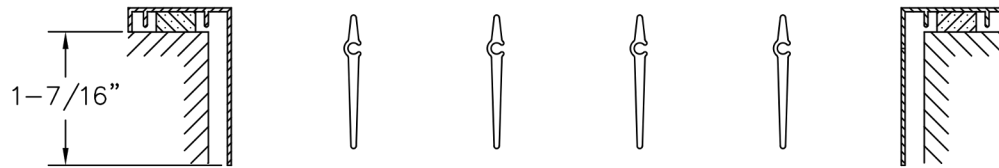

-R-G
Recessed Blades
with Gang Operator

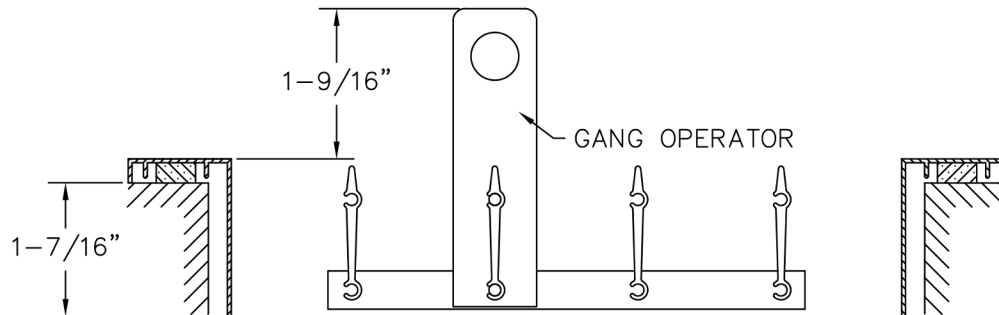

Gang operator can extend up to $1-9/16"$.
An extra operator required to be installed every 26" in length.
Only available with -R Recessed Blade option specified.