




- Individually adjustable horizontal blades with 1-1/2" spacing.
- Fully extruded, high quality aluminum blades with semi-airfoil design.
- Opposed blade damper with slide operator.
- High quality aluminum extruded frame.
- Sealing gasket used to prevent streaking on walls or ceiling.
- Countersunk #6 screw hole mounting c/w painted screws.
- Mullions used for sizes over 26" in length.
- Available on 2" increments as standard. Custom sizes available down to 1/16" increments.
- Available with durable powder coat finish.

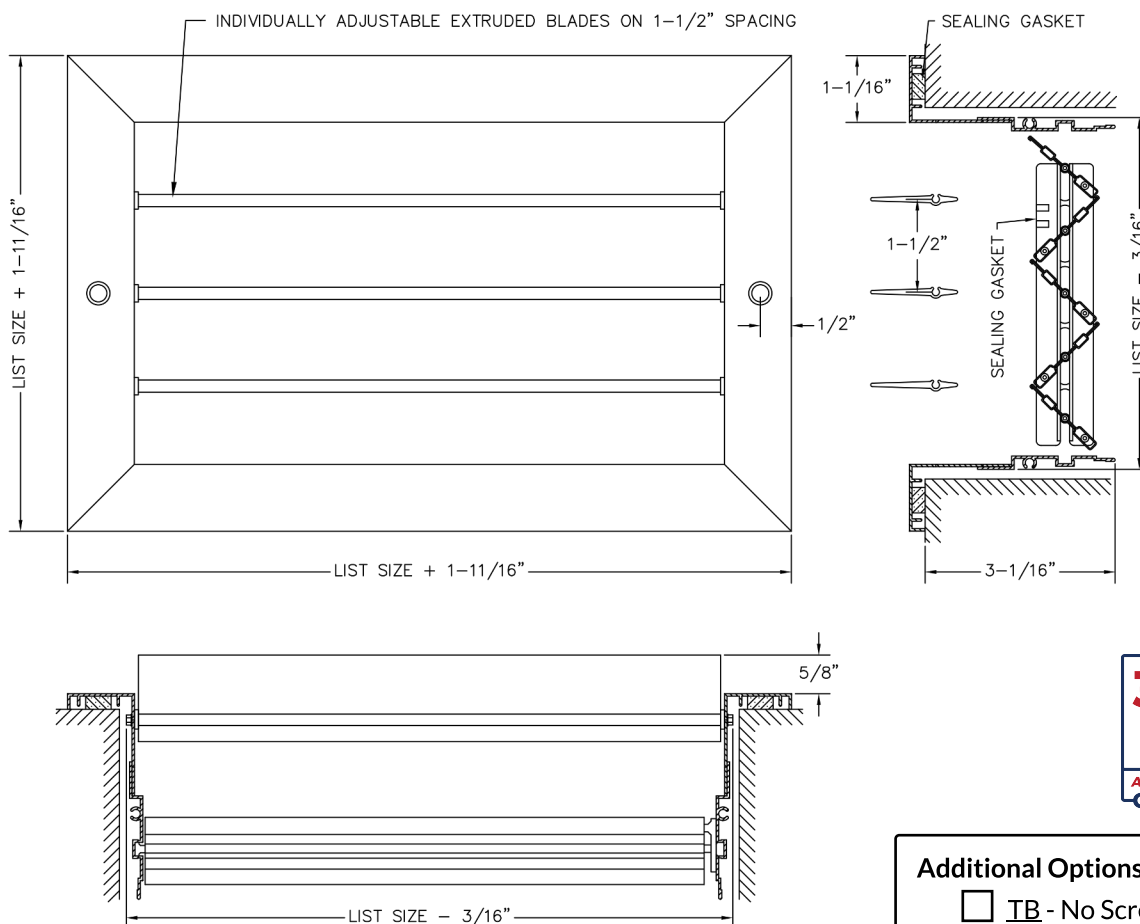

**3 DAY
SHIP**
**ANY SIZE. ANY MODEL.
GUARANTEED.**

1. Specify the Length x Height Dimensions

Inches MM _____ x _____

2. Select a Finish

W White
S Silver
B Brown
M Mill

FB - Flat Black
Special:

3. Select a Lead Time

- ☐ 3 Day Ship
- ☐ Next Friday
- ☐ Standard Delivery

Additional Options

- ☐ TB - No Screw Holes
☐ R - Recessed Blades
☐ R-G - Recessed Blades
 & Gang Operator

Project / Location: _____

Architect: _____

Engineer: _____

Contractor: _____


Phone: (519) 737-1199 Fax: (519) 737-1831 Email: mail@dayus.com Web: www.dayus.com

5290 Pulleyblank St., RR#1 Windsor, Ontario N9G 0B8

OPTIONS


Standard

No additional option

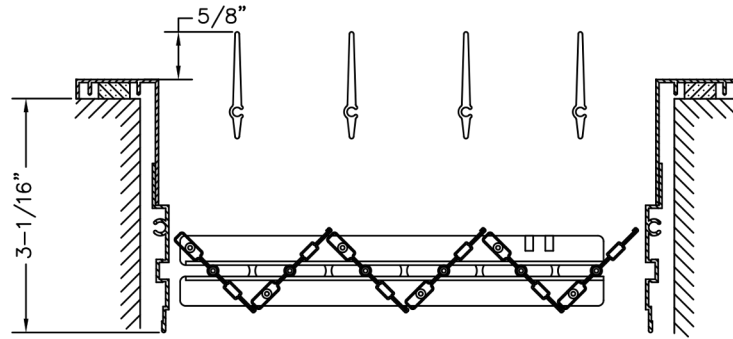


-R

Recessed Blades

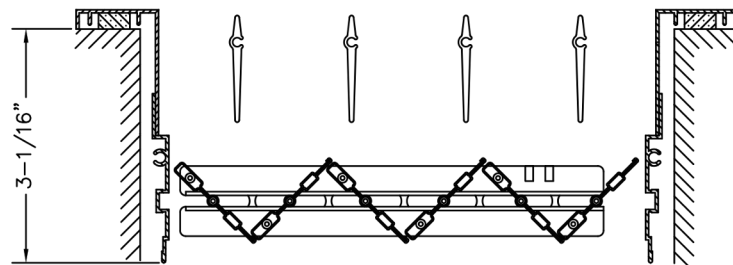

-R-G

Recessed Blades
with Gang Operator

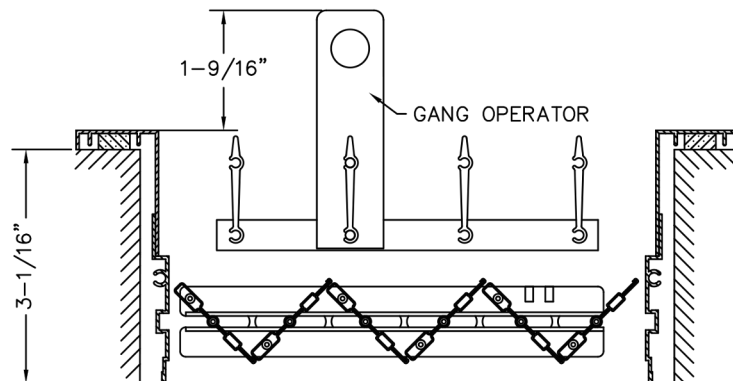

Gang operator can extend up to 1-9/16".
An extra operator required to be installed every 26" in length.
Only available with -R Recessed Blade option specified.