


- Individually adjustable vertical blades with 1-1/2" spacing.
- Fully extruded, high quality aluminum blades with semi-airfoil design.
- Opposed blade damper with slide operator.
- High quality aluminum extruded frame.
- Sealing gasket used to prevent streaking on walls or ceiling.
- Countersunk #6 screw hole mounting c/w painted screws.
- Mullions used for sizes over 26" in height.
- Available on 2" increments as standard, and custom sizes up to 1/16" increments.
- Available with durable powder coat finish.

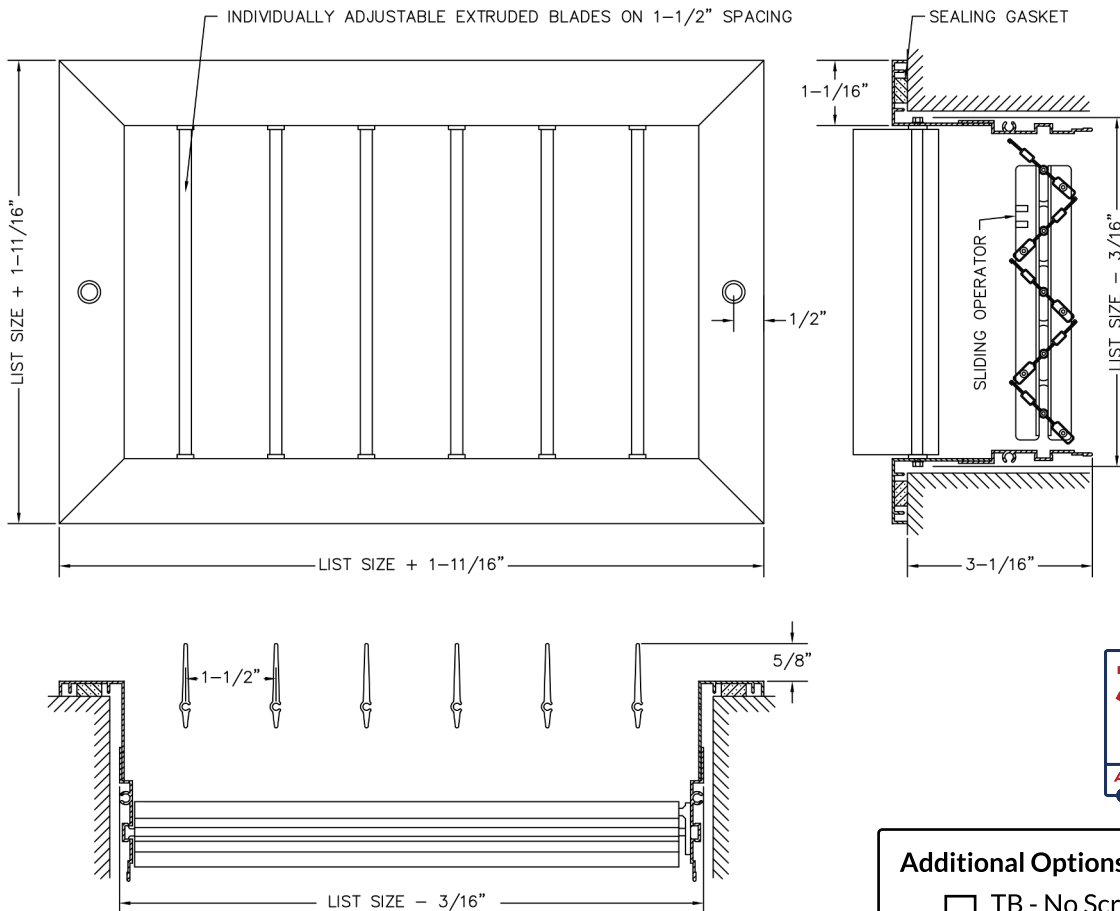

3 DAY SHIP
ANY SIZE. ANY MODEL.
GUARANTEED

- Additional Options**
- TB** - No Screw Holes
 - R** - Recessed Blades
 - R-G** - Recessed Blades & Gang Operator

1. Specify the Length x Height Dimensions

Inches MM _____ x _____

2. Select a Finish

- W White
- S Silver
- B Brown
- M Mill

FB - Flat Black
Special: _____

3. Select a Lead Time

- 3 Day Ship
- Next Friday
- Standard Delivery

Project / Location: _____

Architect: _____


Engineer: _____

Contractor: _____




OPTIONS


Standard
No additional option

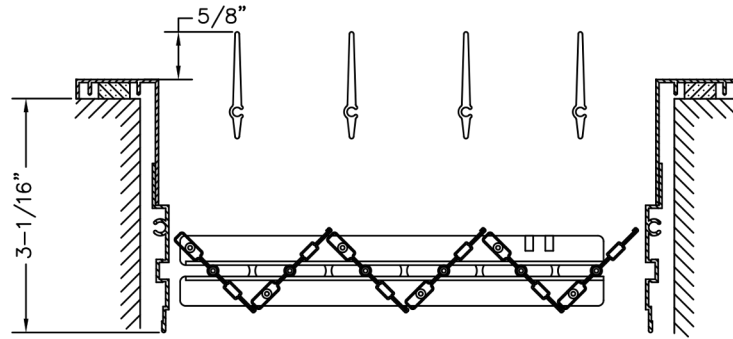

-R
Recessed Blades

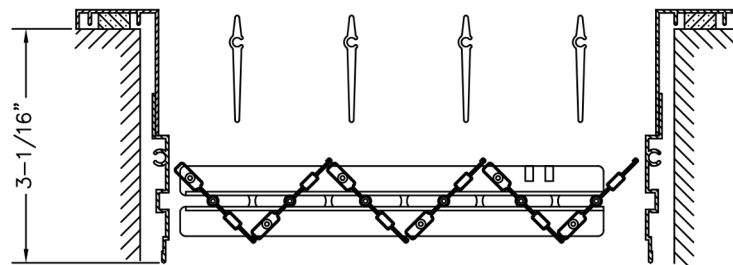

-R-G
Recessed Blades
with Gang Operator

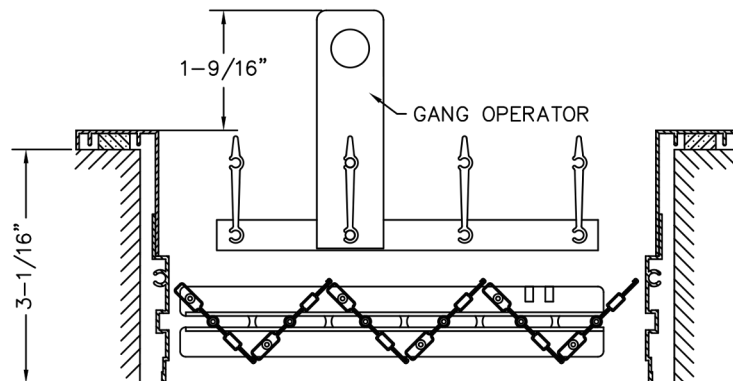

Gang operator can extend up to 1-9/16".
An extra operator required to be installed every 26" in length.
Only available with -R Recessed Blade option specified.