




- Individually adjustable horizontal blades with 2/3" spacing.
- Roll-formed aluminum blades with semi-airfoil design.
- Pressure-fit nylon pivot pins provide rattle free performance.
- High quality aluminum extruded frame.
- Sealing gasket used to prevent streaking on walls or ceiling.
- Countersunk #6 screw hole mounting c/w painted screws.
- Mullions used for sizes over 18" in length.
- Available on 2" increments as standard. Custom sizes available down to 1/16" increments.
- Available with durable powder coat finish.

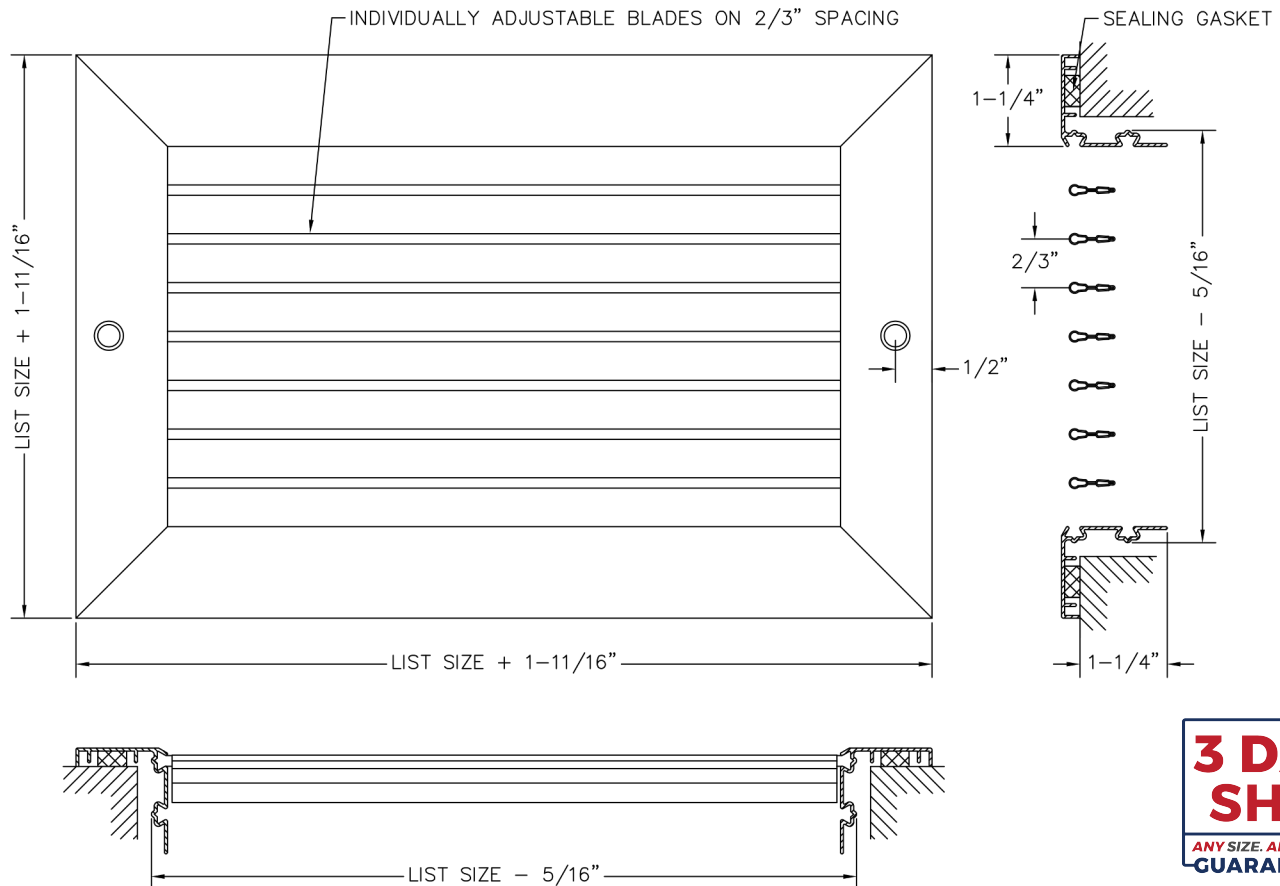

1. Specify the Length x Height Dimensions

Inches MM _____ x _____

2. Select a Finish

W - White
S - Silver
M - Mill

3. Select a Lead Time

- ☐ 3 Day Ship
☐ Next Friday
☐ Standard Delivery

Additional Options

- ☐ D - Opposed Blade Damper
☐ TB - No Screw Holes
☐ AA - All Aluminum

Project / Location: _____

Architect: _____

Engineer: _____

Contractor: _____