




- Heavy-duty, extruded aluminum flange frame.
- Fixed, non-drainable blades on 2" spacing.
- J-blade design minimizes water ingress while maximizing free area.
- Nominal 43% free area, based on 48" x 48" louver.
- Mullions used for sizes over 36" in length.
- Bird screen included standard. Insect screen can be specified.
- Available with AAMA 2605 powder coat paint for high-performance exterior finishes.

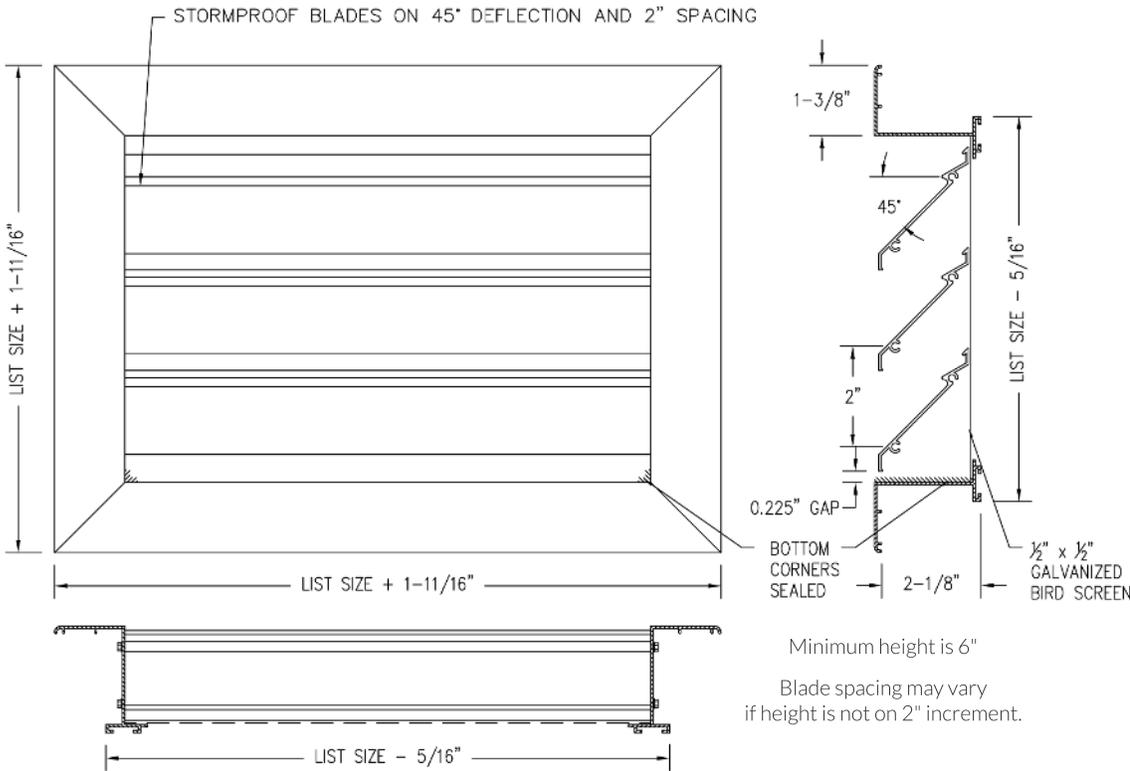

Material	6063-T5
Blade Angle	45°
Blade Spacing	2"
Mullion Start	36"
Minimum Size	3 x 6"
Free Area Based on 48"x 48"	43%

1. Specify Quantity

2. Specify the Length x Height Dimensions

Available on 1" increments as standard. Custom sizes down to 1/16" increments.

_____ x _____ inches mm

3. Select a Finish

- W - White
- S - Silver
- B - Brown
- M - Mill
- FB - Flat Black
- AAMA 2605 Powder Coat
- Special:
- _____

4. Select a Lead Time

- 3 Day Ship
- Next Friday
- Standard Delivery

3 DAY SHIP
ANY SIZE. ANY MODEL.
GUARANTEED

Additional Options

- IS - Insect Screen
- Δ - Screw Holes

Project / Location:

Architect:

Engineer:

Contractor:



Scan for more product information.

Free Area – ft² (m²)

OPENING LENGTH in inches (mm)

	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102	108	114	120
	300	450	600	750	900	1050	1200	1350	1500	1700	1850	2000	2150	2300	2450	2600	2750	2900	3050
8	0.16	0.26	0.36	0.45	0.55	0.61	0.71	0.81	0.90	1.00	1.10	1.16	1.26	1.36	1.45	1.55	1.65	1.71	1.81
200	0.02	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.08	0.09	0.10	0.11	0.12	0.13	0.14	0.14	0.15	0.16	0.17
12	0.30	0.48	0.66	0.84	1.02	1.15	1.33	1.51	1.69	1.87	2.05	2.17	2.35	2.53	2.71	2.89	3.07	3.20	3.38
300	0.03	0.04	0.06	0.08	0.10	0.11	0.12	0.14	0.16	0.17	0.19	0.20	0.22	0.24	0.25	0.27	0.29	0.30	0.31
18	0.51	0.82	1.12	1.43	1.74	1.94	2.25	2.56	2.86	3.17	3.48	3.68	3.99	4.29	4.60	4.91	5.21	5.42	5.73
450	0.05	0.08	0.10	0.13	0.16	0.18	0.21	0.24	0.27	0.29	0.32	0.34	0.37	0.40	0.43	0.46	0.48	0.50	0.53
24	0.72	1.15	1.59	2.02	2.45	2.74	3.17	3.60	4.04	4.47	4.90	5.19	5.62	6.06	6.49	6.92	7.35	7.64	8.08
600	0.07	0.11	0.15	0.19	0.23	0.25	0.29	0.33	0.38	0.42	0.46	0.48	0.52	0.56	0.60	0.64	0.68	0.71	0.75
30	0.93	1.49	2.05	2.61	3.16	3.54	4.10	4.65	5.21	5.77	6.33	6.70	7.26	7.82	8.38	8.94	9.49	9.87	10.42
750	0.09	0.14	0.19	0.24	0.29	0.33	0.38	0.43	0.48	0.54	0.59	0.62	0.67	0.73	0.78	0.83	0.88	0.92	0.97
36	1.14	1.82	2.51	3.19	3.88	4.33	5.02	5.70	6.39	7.07	7.76	8.21	8.90	9.58	10.26	10.95	11.63	12.09	12.77
900	0.11	0.17	0.23	0.30	0.36	0.40	0.47	0.53	0.59	0.66	0.72	0.76	0.83	0.89	0.95	1.02	1.08	1.12	1.19
42	1.35	2.16	2.97	3.78	4.59	5.13	5.94	6.75	7.56	8.37	9.18	9.72	10.53	11.34	12.15	12.96	13.77	14.31	15.12
1050	0.13	0.20	0.28	0.35	0.43	0.48	0.55	0.63	0.70	0.78	0.85	0.90	0.98	1.05	1.13	1.20	1.28	1.33	1.41
48	1.56	2.50	3.43	4.37	5.30	5.93	6.86	7.80	8.74	9.67	10.61	11.23	12.17	13.10	14.04	14.98	15.91	16.54	17.47
1200	0.14	0.23	0.32	0.41	0.49	0.55	0.64	0.72	0.81	0.90	0.99	1.04	1.13	1.22	1.30	1.39	1.48	1.54	1.62
54	1.77	2.83	3.89	4.96	6.02	6.73	7.79	8.85	9.91	10.97	12.04	12.74	13.80	14.87	15.93	16.99	18.05	18.76	19.82
1350	0.16	0.26	0.36	0.46	0.56	0.62	0.72	0.82	0.92	1.02	1.12	1.18	1.28	1.38	1.48	1.58	1.68	1.74	1.84
60	1.98	3.17	4.36	5.54	6.73	7.52	8.71	9.90	11.09	12.27	13.46	14.25	15.44	16.63	17.82	19.00	20.19	20.98	22.17
1500	0.18	0.29	0.40	0.51	0.63	0.70	0.81	0.92	1.03	1.14	1.25	1.32	1.43	1.54	1.66	1.77	1.88	1.95	2.06
66	2.19	3.50	4.82	6.13	7.44	8.32	9.63	10.95	12.26	13.57	14.89	15.76	17.08	18.39	19.70	21.02	22.33	23.21	24.52
1700	0.20	0.33	0.45	0.57	0.69	0.77	0.89	1.02	1.14	1.26	1.38	1.46	1.59	1.71	1.83	1.95	2.07	2.16	2.28
72	2.40	3.84	5.28	6.72	8.16	9.12	10.56	12.00	13.44	14.88	16.31	17.27	18.71	20.15	21.59	23.03	24.47	25.43	26.87
1850	0.22	0.36	0.49	0.62	0.76	0.85	0.98	1.11	1.25	1.38	1.52	1.60	1.74	1.87	2.01	2.14	2.27	2.36	2.50
78	2.61	4.17	5.74	7.31	8.87	9.91	11.48	13.04	14.61	16.18	17.74	18.24	19.81	21.38	22.95	24.52	25.48	27.05	28.62
2000	0.24	0.39	0.53	0.68	0.82	0.92	1.07	1.21	1.36	1.50	1.65	1.74	1.89	2.03	2.18	2.32	2.41	2.56	2.71
84	2.82	4.51	6.20	7.89	9.58	10.71	12.40	14.09	15.79	17.48	19.17	19.67	21.36	23.05	24.74	26.43	27.39	29.08	30.77
2150	0.26	0.42	0.58	0.73	0.89	1.00	1.15	1.31	1.47	1.62	1.78	1.87	2.03	2.19	2.34	2.43	2.59	2.75	2.91
90	3.03	4.85	6.66	8.48	10.30	11.51	13.33	15.14	16.96	18.78	20.59	21.09	22.78	24.59	26.40	28.21	29.17	30.98	32.79
2300	0.28	0.45	0.62	0.79	0.96	1.07	1.24	1.41	1.58	1.74	1.91	1.99	2.16	2.33	2.50	2.59	2.76	2.92	3.09
96	3.24	5.18	7.12	9.07	11.01	12.31	14.25	16.19	18.13	20.08	22.02	22.52	24.46	26.40	28.34	29.29	31.23	33.17	35.11
2450	0.30	0.48	0.66	0.84	1.02	1.14	1.32	1.50	1.68	1.87	2.05	2.13	2.31	2.49	2.67	2.76	2.94	3.12	3.30
102	3.45	5.52	7.59	9.65	11.72	13.10	15.17	17.24	19.31	21.38	23.45	23.95	25.99	28.13	30.27	32.21	34.15	36.09	38.03
2600	0.32	0.51	0.70	0.90	1.09	1.22	1.41	1.60	1.79	1.99	2.18	2.26	2.45	2.64	2.83	2.92	3.11	3.29	3.48
108	3.66	5.85	8.05	10.24	12.44	13.90	16.09	18.29	20.48	22.68	24.87	25.37	27.56	29.75	31.94	33.88	35.92	37.86	39.80
2750	0.34	0.54	0.75	0.95	1.16	1.29	1.50	1.70	1.90	2.11	2.31	2.39	2.59	2.79	2.98	3.17	3.36	3.55	3.74
114	3.87	6.19	8.51	10.83	13.15	14.70	17.02	19.34	21.66	23.98	26.30	26.80	29.12	31.44	33.76	35.60	37.64	39.58	41.52
2900	0.36	0.57	0.79	1.01	1.22	1.37	1.58	1.80	2.01	2.23	2.44	2.52	2.73	2.94	3.15	3.34	3.54	3.73	3.93
120	4.08	6.52	8.97	11.42	13.86	15.49	17.94	20.39	22.83	25.28	27.73	28.23	30.67	33.11	35.55	37.39	39.43	41.37	43.31
3050	0.38	0.61	0.83	1.06	1.29	1.44	1.67	1.89	2.12	2.35	2.58	2.66	2.87	3.08	3.29	3.48	3.68	3.87	4.07


OPENING HEIGHT in inches (mm)



Scan for more product information.

Pressure Drop

Louver Test Size: 48" x 48" (120mm x 120mm)

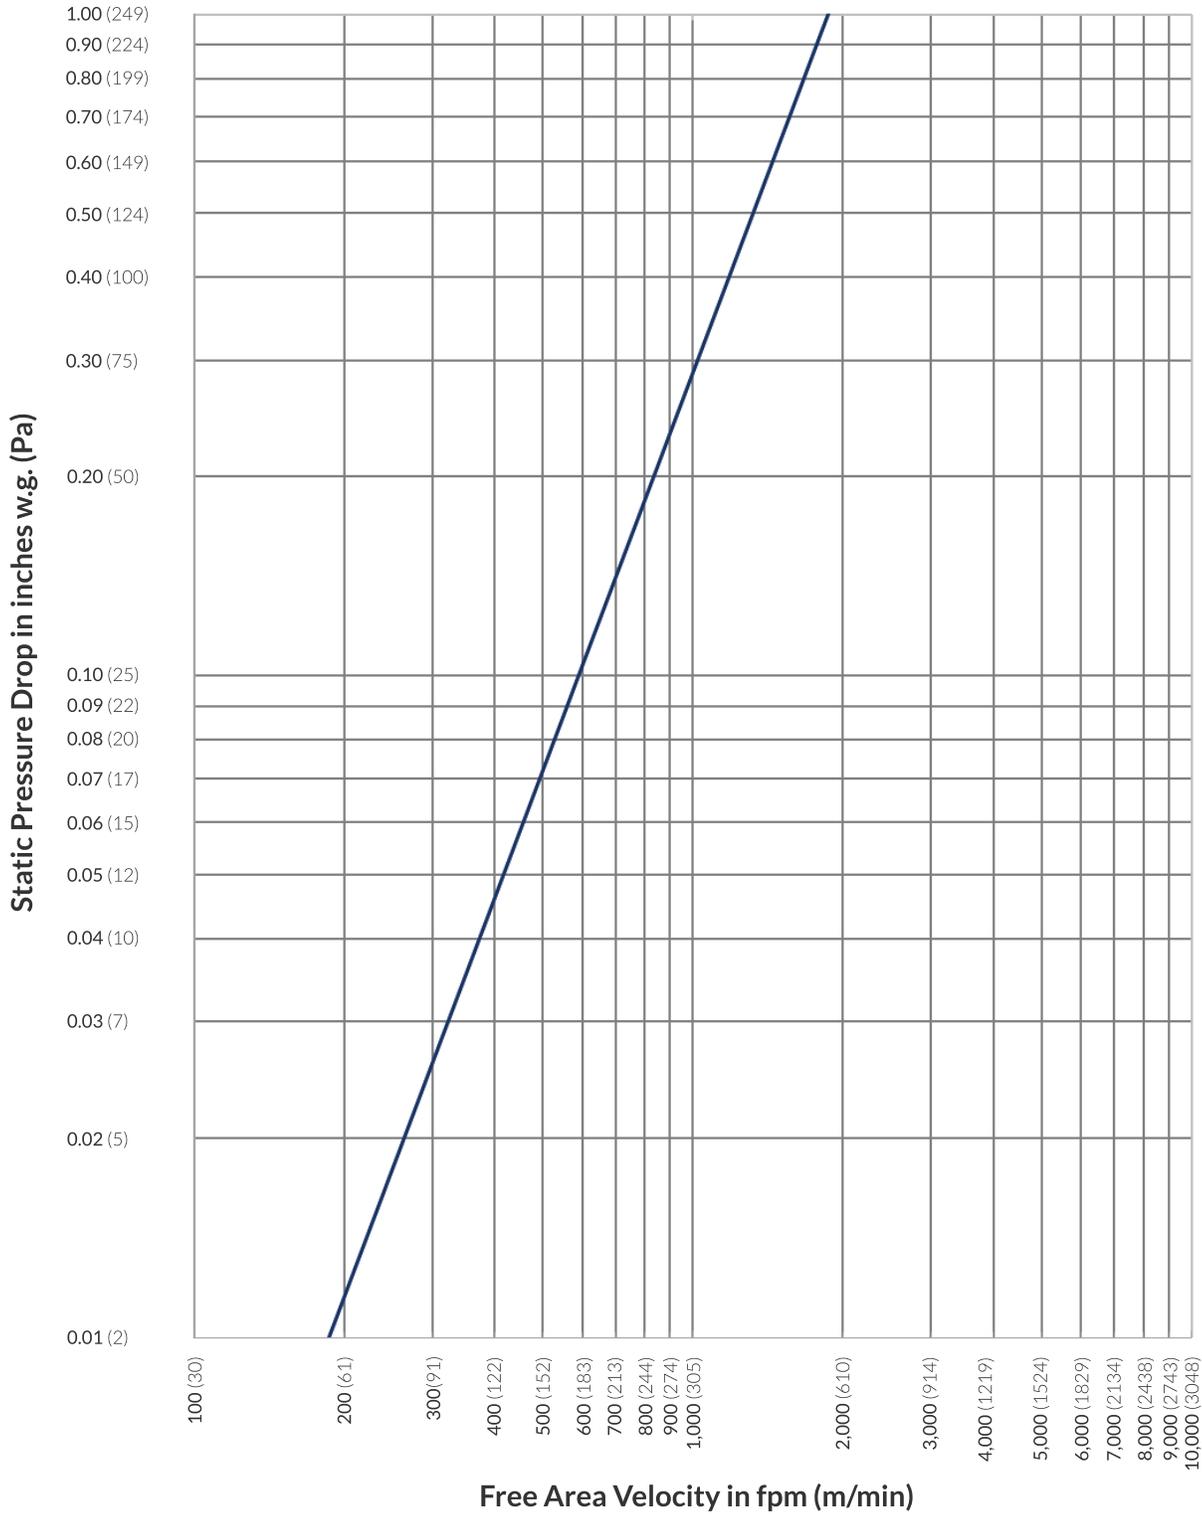

Scan for more product information.