



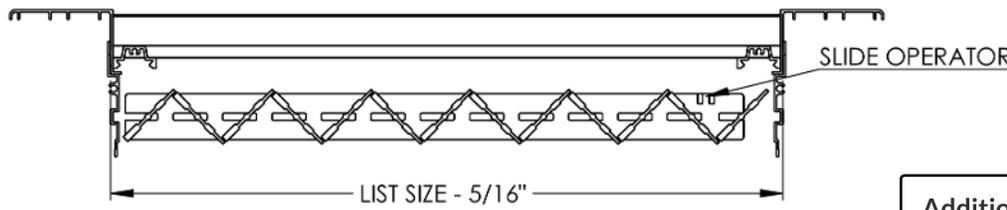

- Wide flange for additional surface coverage.
- Opposed blade damper with slide operator.
- Horizontal blades fixed on 30° deflection with 3/4" spacing.
- Constructed with high-quality, fully-extruded aluminum with blades designed for high efficiency.
- All supports are hidden behind blades for a continuous appearance.
- Countersunk #6 screw hole mounting c/w painted screws.
- Available on 2" increments as standard. Custom sizes available down to 1/16" increments.
- Available with durable powder coat finish.

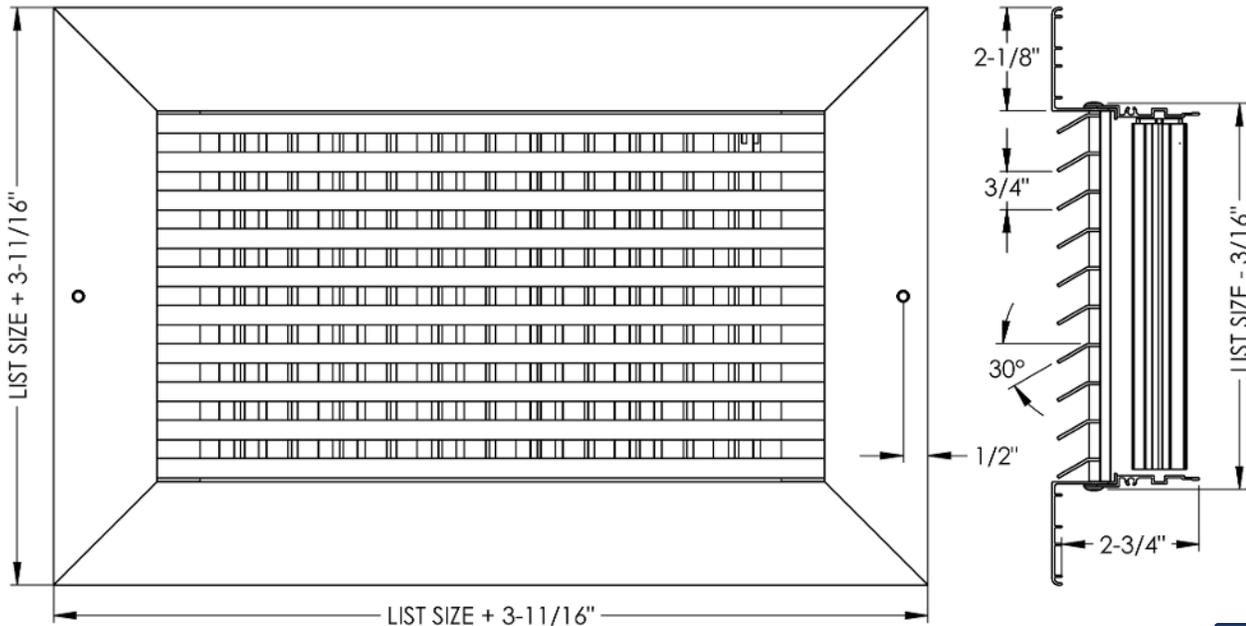

3 DAY SHIP
ANY SIZE. ANY MODEL.
GUARANTEED

Additional Options

TB - No Screw Holes

BS - Bird Screen

IS - Insect Screen

AA - All Aluminum

Qty _____

1. Specify the Length x Height Dimensions

Inches MM _____ x _____

2. Select a Finish

W - White FB - Flat Black

S - Silver Special: _____

B - Brown

M - Mill

3. Select a Lead Time

3 Day Ship

Next Friday

Standard Delivery

Project / Location: _____

Architect: _____

Engineer: _____

Contractor: _____

