





- Vertical and horizontal adjustable curved blades with 1" spacing.
- Pressure-fit nylon pivot pins provide rattle free performance.
- High quality aluminum extruded frame and roll-formed aluminum blades.
- Countersunk #6 screw hole mounting c/w painted screws.
- Mullions used for sizes over 22" in length.
- Available on 2" increments as standard. Custom sizes available down to 1/16" increments.
- Available with durable powder coat finish.

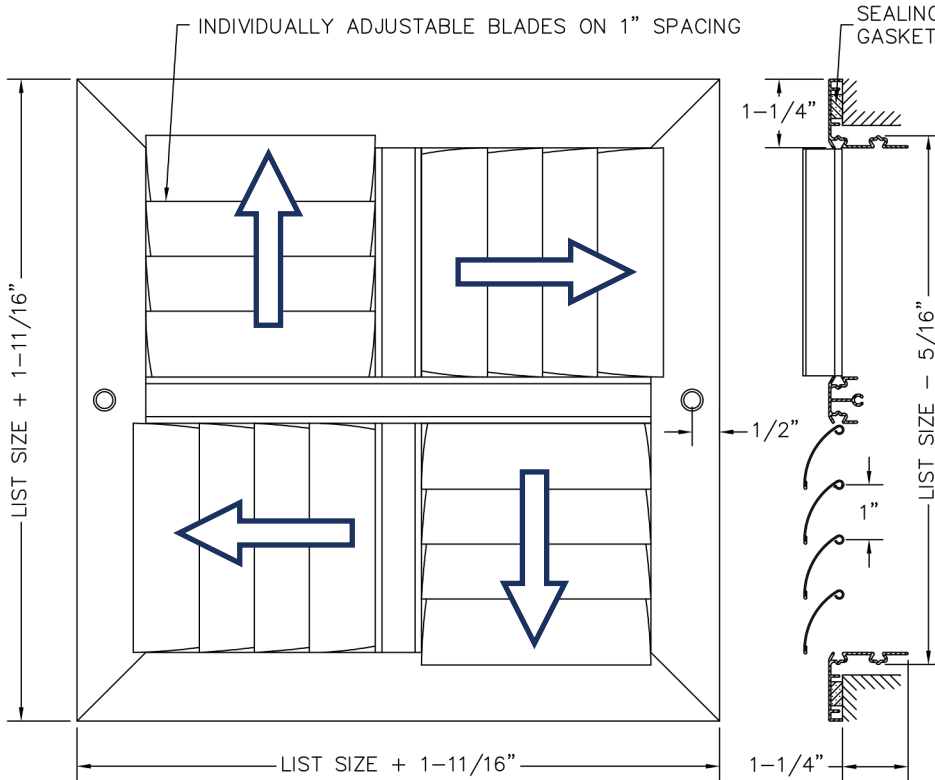

**3 DAY  
SHIP**  
ANY SIZE. ANY MODEL.  
GUARANTEED

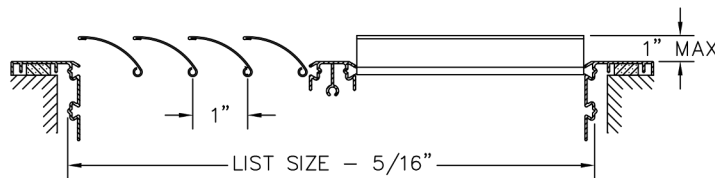

**Additional Options**

**D** - Opposed Blade Damper

**M** - Multi-Shutter Damper

**TB** - No Screw Holes

**AA** - All Aluminum

**1. Specify the Length x Height Dimensions**

Inches    MM \_\_\_\_\_ x \_\_\_\_\_

**2. Select a Finish**

**W** - White

**S** - Silver

**M** - Mill

**3. Select a Lead Time**

3 Day Ship

Next Friday

Standard Delivery

**Project / Location:** \_\_\_\_\_

**Architect:** \_\_\_\_\_

**Engineer:** \_\_\_\_\_

**Contractor:** \_\_\_\_\_

